

9.19

9.19 Because of the velocity deficit, $U - u$, in the boundary layer, the streamlines for flow past a flat plate are not exactly parallel to the plate. This deviation can be determined by use of the displacement thickness, δ^* . For air blowing past the flat plate shown in Fig. P9.19, plot the streamline A-B that passes through the edge of the boundary layer ($y = \delta_B$ at $x = \ell$) at point B. That is, plot $y = y(x)$ for streamline A-B. Assume laminar boundary layer flow.

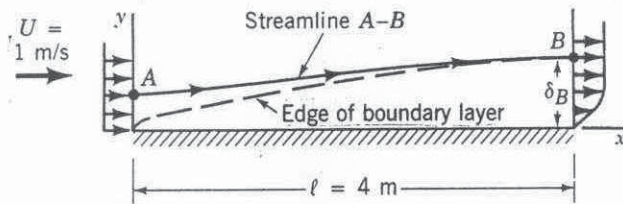


FIGURE P9.19

Since $Re_\ell = \frac{U\ell}{\nu} = \frac{(1 \frac{m}{s})(4m)}{1.46 \times 10^{-5} \frac{m^2}{s}} = 2.74 \times 10^5 < 5 \times 10^5$, the boundary layer flow remains laminar along the entire plate. Hence,

$$\delta = 5\sqrt{\frac{\nu x}{U}} \quad \text{or} \quad \delta_B = 5\sqrt{\frac{(1.46 \times 10^{-5} \frac{m^2}{s})(4m)}{1 \frac{m}{s}}} = 0.0382 \text{ m}$$

The flowrate carried by the actual boundary layer is by definition equal to that carried by a uniform velocity with the plate displaced by an amount δ^* . Since there is no flow through the plate or streamline A-B,

$$Q_A = Q_B, \text{ or } U y_A = (\delta_B - \delta_B^*) U$$

$$\text{where } \delta^* = 1.721\sqrt{\frac{\nu x}{U}}$$

$$\text{or } \delta_B^* = 1.721\sqrt{\frac{(1.46 \times 10^{-5} \frac{m^2}{s})(4m)}{1 \frac{m}{s}}} = 0.01315 \text{ m}$$

Thus,

$$y_A = \delta_B - \delta_B^* = 0.0382 \text{ m} - 0.01315 \text{ m} = 0.0251 \text{ m}$$

Hence, for any x -location

$$Q_A = Q \text{ or } U y_A = U(y - \delta^*)$$

$$\text{or } y = y_A + \delta^* = y_A + 1.721\sqrt{\frac{\nu x}{U}}$$

$$= 0.0251 \text{ m} + 1.721\sqrt{\frac{(1.46 \times 10^{-5} \frac{m^2}{s})x}{1 \frac{m}{s}}} = 0.0251 + 6.58 \times 10^{-3} \sqrt{x} \text{ m, where } x \sim \text{m}$$

