

9.20

9.20 Air enters a square duct through a 1-ft opening as is shown in Fig. P9.20. Because the boundary layer displacement thickness increases in the direction of flow, it is necessary to increase the cross-sectional size of the duct if a constant  $U = 2$  ft/s velocity is to be maintained outside the boundary layer. Plot a graph of the duct size,  $d$ , as a function of  $x$  for  $0 \leq x \leq 10$  ft if  $U$  is to remain constant. Assume laminar flow.

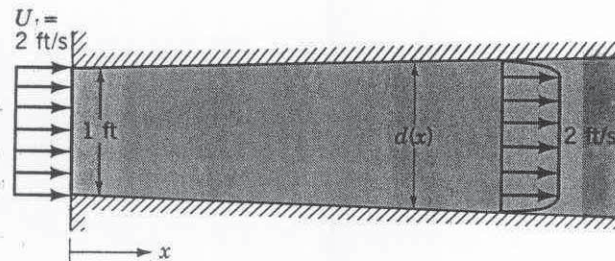


FIGURE P9.20

For incompressible flow  $Q_0 = Q(x)$  where  $Q_0 = \text{flowrate into the duct}$   
 $= UA_0 = (2 \frac{\text{ft}}{\text{s}})(1 \text{ ft}^2) = 2 \frac{\text{ft}^3}{\text{s}}$   
 and

$Q(x) = UA$ , where  $A = (d - 2\delta^*)^2$  is the effective area of the duct (allowing for the decreased flowrate in the boundary layer).

Thus,

$$Q_0 = U(d - 2\delta^*)^2 \quad \text{or} \quad d = 1 \text{ ft} + 2\delta^*, \quad (1)$$

where

$$\delta^* = 1.721 \sqrt{\frac{\nu x}{U}} = 1.721 \left[ \frac{(1.57 \times 10^{-4} \frac{\text{ft}^2}{\text{s}}) x}{2 \frac{\text{ft}}{\text{s}}} \right]^{\frac{1}{2}} = 0.0152 \sqrt{x} \text{ ft, where } x \sim \text{ft}$$

Hence, from Eq. (1)

$$d = \underline{1 + 0.0304 \sqrt{x} \text{ ft}}$$

For example,  $d = 1$  ft at  $x = 0$  and  $d = 1.096$  ft at  $x = 10$  ft.

