

Wastewater Treatment  
Plant  
(Geometric Programming)

This Hypercard stack was prepared by:  
Dennis L. Bricker,  
Dept. of Industrial Engineering,  
University of Iowa,  
Iowa City, Iowa 52242  
e-mail: dbricker@icaen.uiowa.edu




A paper manufacturer must build a wastewater treatment plant for the removal of pulp and other byproducts.

The quality of the effluent is measured in units of

% 5-day BOD (biological oxygen demand) **removed**


*1 lb. 5-day BOD = quantity of organic waste which will consume 1 pound of oxygen during 5 days of decomposition.*

Nine processes are available, and may be combined in a series....

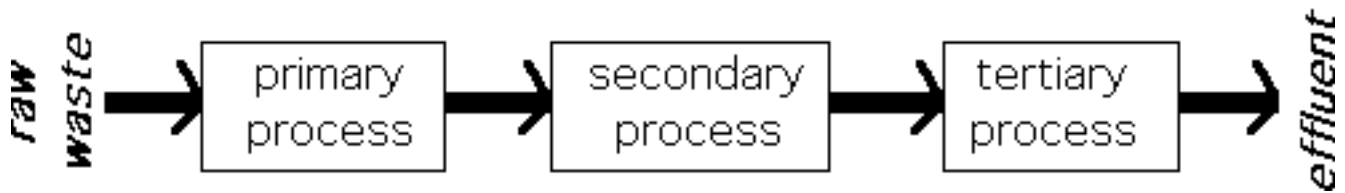

©D.Bricker, U. of IA, 1999

Each process  $i$  may be designed to remove any specified fraction of BOD from its input.

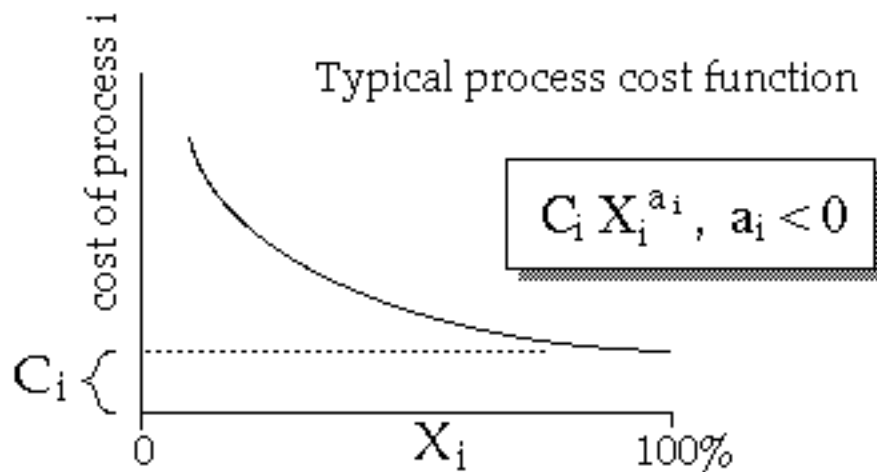

$X_i$  = % of BOD input to process  $i$  which remains in the output of that process

©D.Bricker, U. of IA, 1999

**Available Processes**

<i>i</i>		$C_i$	$a_i$
1	Primary Clarifier (PC)	1.94	-1.47
2	Trickling Filter (TF)	16.8	-1.66
3	Activated Sludge (AS) following TF	91.5	-0.3
4	" " (AS) following PC	86	-0.38
5	Aerated Lagoon (AL) following PC	45.9	-0.45
6	" " (AL) following TF	27.4	-0.63
7	Coagulation/sedimentation/filtration (CSF) following AS	152	-0.27
8	Carbon Adsorption (CA) following AS	120	-0.33
9	CSF following AL	179	-0.37

©D.Bricker, U. of IA, 1999

*Possible designs include*

design #	Primary	Secondary	Tertiary
1	PC	TF + AS	CA
2	PC	TF + AL	CS
3	PC	AS	CA
4	PC	AL	CS
5	PC	TF + AS	CS
6	PC	AS	CS
7	PC	AS	none
8	PC	TF + AS	none
9	PC	AL	none
10	PC	TF + AL	none


©D.Bricker, U. of IA, 1999

The design problem is one of choosing the combination of processes and appropriate process levels to

- minimize the sum of total annual costs
- attain a required effluent quality  $K$   
= maximum 5-day BOD as % of raw waste BOD

©D.Bricker, U. of IA, 1999


It would be very expensive to use a single process to remove the entire required amount of BOD

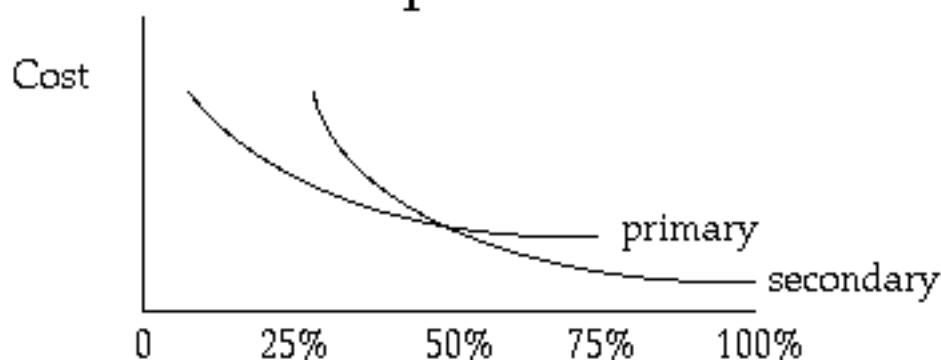

The primary process will remove a relatively large amount of BOD very cheaply... then a secondary process may bring effluent to required levels.

©D.Bricker, U. of IA, 1999

Since the individual processes act in series, their effect is multiplicative:

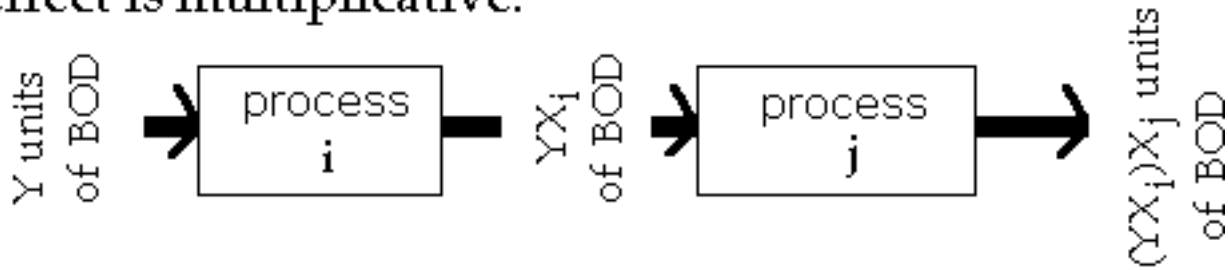

$$X_i X_j = \% \text{ of original BOD remaining}$$

©D.Bricker, U. of IA, 1999

For a design involving processes  $i=1, 2, \dots, N$   
the minimum cost is found by

$$\begin{aligned} &\text{Minimize } C_1 X_1^{a_1} + C_2 X_2^{a_2} + \dots + C_N X_N^{a_N} \\ &\text{subject to} \\ &\quad X_1 X_2 \dots X_N \leq K \\ &\quad \text{i.e., } \frac{1}{K} X_1 X_2 \dots X_N \leq 1 \\ &\quad (X_1 > 0, X_2 > 0, \dots, X_N > 0) \end{aligned}$$

$$T = \# \text{terms} = N+1$$

$$\# \text{degrees of difficulty} = T - (N+1) = 0$$

©D.Bricker, U. of IA, 1999

**Example****Design #1**

Uses combination of 4 processes in series:

- #1: Primary Clarifier
- #2: Trickling Filter
- #3: Activated Sludge
- #8: Carbon Absorption

Suppose that 97.1% of the BOD must be removed,  
i.e.,  $K = 2.9\%$  is maximum BOD remaining

$$\frac{1}{K} = \frac{1}{0.029} \approx 34.5$$

©D.Bricker, U. of IA, 1999

$$\text{primal} \left\{ \begin{array}{l} \text{Min } 19.4X_1^{-1.47} + 16.8X_2^{-1.66} + 91.5X_3^{-0.3} + 120X_8^{-0.33} \\ \text{subject to } 34.5 X_1 X_2 X_3 X_8 \leq 1 \\ X_1 > 0, X_2 > 0, X_3 > 0, X_8 > 0 \end{array} \right.$$

$$\text{dual} \left\{ \begin{array}{l} \text{Max } \left(\frac{19.4}{\delta_1}\right)^{\delta_1} \left(\frac{16.8}{\delta_2}\right)^{\delta_2} \left(\frac{91.5}{\delta_3}\right)^{\delta_3} \left(\frac{120}{\delta_4}\right)^{\delta_4} \left(\frac{34.5}{\delta_5}\right)^{\delta_5} \lambda_1 \\ \delta_1 + \delta_2 + \delta_3 + \delta_4 = 1 \quad \text{normality} \\ \delta_5 = \lambda_1 \\ \left. \begin{array}{l} -1.47\delta_1 + \delta_5 = 0 \\ -1.66\delta_2 + \delta_5 = 0 \\ -0.3\delta_3 + \delta_5 = 0 \\ -0.33\delta_4 + \delta_5 = 0 \end{array} \right\} \text{orthogonality} \\ \delta_j \geq 0, j=1,2,3,4; \lambda_1 \geq 0 \end{array} \right.$$

©D.Bricker, U. of IA, 1999

$$-1.47\delta_1 + \delta_5 = 0 \Rightarrow \delta_1 = \frac{\delta_5}{1.47}$$

$$-1.66\delta_2 + \delta_5 = 0 \Rightarrow \delta_2 = \frac{\delta_5}{1.66}$$

$$-0.3\delta_3 + \delta_5 = 0 \Rightarrow \delta_3 = \frac{\delta_5}{0.3}$$

$$-0.33\delta_4 + \delta_5 = 0 \Rightarrow \delta_4 = \frac{\delta_5}{0.33}$$

*0.1307818986*

$$\delta_1 + \delta_2 + \delta_3 + \delta_4 = 1 \Rightarrow \frac{\delta_5}{1.47} + \frac{\delta_5}{1.66} + \frac{\delta_5}{0.3} + \frac{\delta_5}{0.33} = 1$$

©D.Bricker, U. of IA, 1999

$$\delta_5 = \frac{1}{\frac{1}{1.47} + \frac{1}{1.66} + \frac{1}{0.3} + \frac{1}{0.33}} = 0.13078$$

$$\delta_1 = \frac{\delta_5}{1.47} = 0.131 \quad \text{i.e., cost of process \#1 should be 13.1\% of the total cost,}$$

$$\delta_2 = \frac{\delta_5}{1.66} = 0.089 \quad \text{cost of process \#2 should be 8.9\% of the total cost,}$$

$$\delta_3 = \frac{\delta_5}{0.3} = 0.436 \quad \text{etc.}$$

$$\delta_4 = \frac{\delta_5}{0.33} = 0.394$$

independent  
of K!

©D.Bricker, U. of IA, 1999

Optimal cost is

$$\left(\frac{19.4}{\delta_1}\right)^{\delta_1} \left(\frac{16.8}{\delta_2}\right)^{\delta_2} \left(\frac{91.5}{\delta_3}\right)^{\delta_3} \left(\frac{120}{\delta_4}\right)^{\delta_4} \left(\frac{34.5}{\delta_5}\right)^{\delta_5} \lambda_1 = 387.439$$

*optimal dual value = optimal primal cost!*

©D.Bricker, U. of IA, 1999

Solving for the primal variables:

$$C_i X_i^{a_i} = \delta_i V^* \Rightarrow X_i = \left(\frac{\delta_i V^*}{C_i}\right)^{1/a_i}$$

$$\text{E.g., } 19.4 X_1^{-1.47} = 0.0889673 \times 387.439 \Rightarrow X_1 = 0.676367$$

$$\Rightarrow \begin{cases} X_1 = 0.676367 \\ X_2 = 0.69787 \\ X_3 = 0.129609 \\ X_8 = 0.473792 \end{cases} \quad \begin{array}{l} \text{i.e., process \# 1 should} \\ \text{remove all but 67.6367\%} \\ \text{of the BOD, etc.} \end{array}$$

©D.Bricker, U. of IA, 1999




In general, for any K the optimal cost for design 1 is

$$V^*(K) = \left(\frac{19.4}{\delta_1}\right)^{\delta_1} \left(\frac{16.8}{\delta_2}\right)^{\delta_2} \left(\frac{91.5}{\delta_3}\right)^{\delta_3} \left(\frac{120}{\delta_4}\right)^{\delta_4} \left(\frac{1}{K\delta_5}\right)^{\delta_5} \lambda_1^{\lambda_1}$$

$$= 243.829 K - 0.130782$$

©D.Bricker, U. of IA, 1999

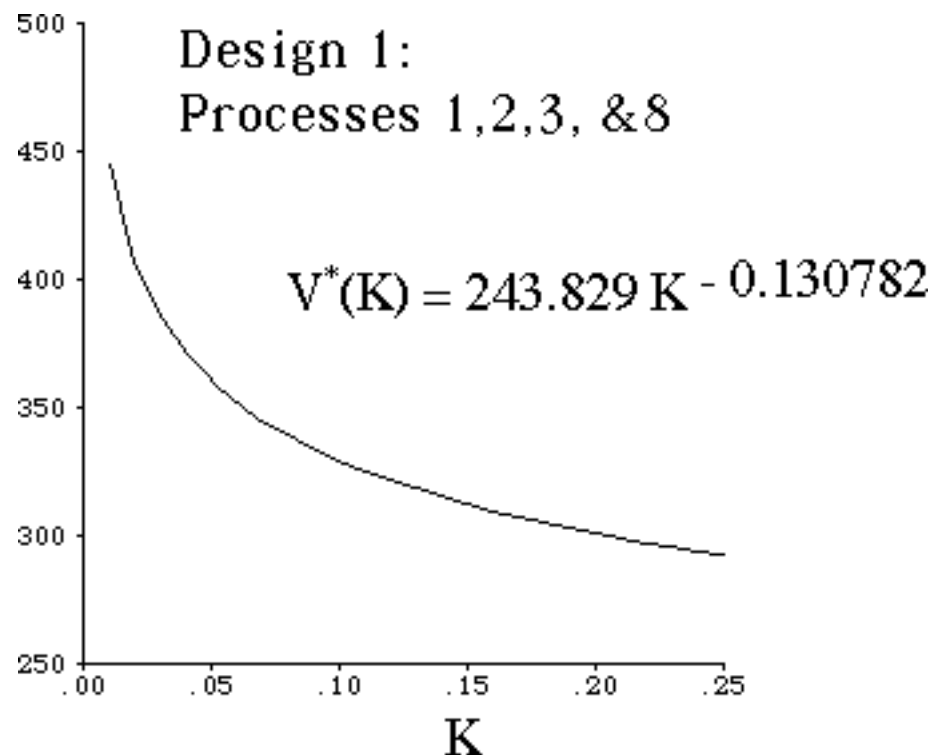

©D.Bricker, U. of IA, 1999

By enumerating all of the possible combinations of processes, the least-cost design may be determined. *(choice depends upon K!)*

©D.Bricker, U. of IA, 1999

In the case of design 1, the optimal primal variables are:

$$X_i = \left( \frac{243.829 \delta_i K - 0.130782}{C_i} \right)^{1/a_i}$$

©D.Bricker, U. of IA, 1999

For each design  $t$  ( $t=1, 2, 3, \dots, 10$ )  
 the optimal cost may easily be computed:

$$V_t^*(K) = C_t K^{-A_t}$$

where  $C_t$  and  $A_t$  are given on the  
 following screen.

©D.Bricker, U. of IA, 1999

Design	Processes	C	A	V(0.029)
1	1 2 3 8	243.829	-0.130782	387.414
2	1 2 6 7	203.452	-0.152122	348.63
3	1 4 8	223.887	-0.157675	391.264
4	1 5 9	211.162	-0.178406	397.129
5	1 2 3 7	274.322	-0.120196	419.831
6	1 4 7	255.172	-0.14254	422.672
7	1 4	105.245	-0.301946	306.53
8	1 2 3	127.688	-0.216637	274.948
9	1 5	64.659	-0.344531	218.969
10	1 2 6	61.713	-0.348434	211.9

\*\*

©D.Bricker, U. of IA, 1999

$$V_t^*(K)$$

		K							
t	process	1%	1.5%	2%	2.5%	3%	3.5%	4%	5%
1	1 2 3 8	445.30	422.30	406.70	395.01	385.70	378.00	371.46	360.77
2	1 2 6 7	409.93	385.41	368.90	356.59	346.84	338.80	331.99	320.91
3	1 4 8	462.78	434.12	414.87	400.53	389.18	379.83	371.92	359.06
4	1 5 9	480.20	446.69	424.35	407.79	394.73	384.03	374.99	360.35
5	1 2 3 7	477.15	454.45	439.01	427.39	418.12	410.45	403.91	393.22
6	1 4 7	491.94	464.32	445.66	431.71	420.63	411.49	403.73	391.09
7	1 4	422.76	374.04	342.92	320.58	303.41	289.61	278.17	260.04
8	1 2 3	346.28	317.16	298.00	283.93	272.94	263.97	256.45	244.34
9	1 5	316.00	274.81	248.87	230.46	216.43	205.23	196.00	181.50
10	1 2 6	307.08	266.62	241.19	223.15	209.41	198.46	189.44	175.27