

# FTB2000 Series

# **Turbine Flow Rate Sensor**

M3236/0602



Operating and Installation Instructions

Prior to installation, confirm system versus sensor specifications and media compatibility of sensor. The system needs to be filtered to 50 microns prior to the sensor, and pulses/water hammer effects should be minimized to prevent unit damage. Observe arrow on bottom of unit for correct inlet and outlet port. Sensor can be mounted in any horizontal, vertical, or skewed orientation. Correctly installed, the sensor works maintenance-free.

## Installation


Apply a sparse amount of thread sealant (Permatex "No More Leaks" ®) or Teflon® tape to male threads. Insure that sealant does not enter into the turbine and bearing internal area. Hand-tighten unit in place. Turn an additional 1/4 turn to provide seal. If seal leaks, turn an additional 1/4 turn until leak stops.

Do not exceed one additional turn total.

## **Specifications**

| Wetted Parts          | Body: Nylon 12/Turbine: Nylon 12 Composite/Bearings: PTFE/ 15% Graphite |  |  |  |  |
|-----------------------|---|--|--|--|--|
| Operating Pressure    | 200 psi   |  |  |  |  |
| Burst Pressure        | 2500 psi  |  |  |  |  |
| Operating Temperature | -4° to 212°F (-20° to 100°C)  |  |  |  |  |
| Viscosity             | 32 to 81 SSU (.8 - 16 Centistokes)                                      |  |  |  |  |
| Filter                | < 50 Microns  |  |  |  |  |
| Input Power           | 5-24 VDC @ 8 mA   |  |  |  |  |
| Output                | NPN Sinking Open Collector @ 50 mA, Max.                                |  |  |  |  |
| Accuracy              | ± 3% of Rdg Normal Range  |  |  |  |  |
| Repeatability         | 0.5% FS Normal Range  |  |  |  |  |
| Electrical Connection | Spade Terminals 110/ 248 X 031" (2.9/6.2 X 9.55)                        |  |  |  |  |

ctrical Connection || Spade Terminals .110/.248 X .031" (2.8/6.3 X .8 mm)

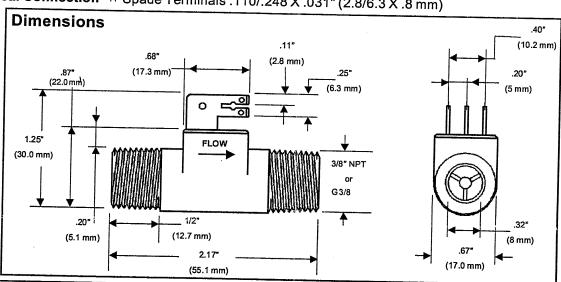

|   | Part<br>Numbers<br>3/8" NPT | Flow Ranges |        |           |          |             |            |                            |
|---|-----------------------------|-------------|--------|-----------|----------|-------------|------------|----------------------------|
|   |                             | Normal      |        | Extended  |          | Pulses      |            | Frequency                  |
|   |                             | GPM         | LPM    | GPM       | LPM      | Per Gallons | Per Liters | Output                     |
| - | FTB2001                     | .13 - 1.3   | .5 - 5 | .07 - 2.6 | .25 - 10 | 26100       | 6900       | 58 - 575 Hz                |
| ļ | FTB2002                     | .26 - 2.6   | 1 - 10 | .07 - 2.6 | .25 - 10 | 12500       | 3300       | 55 - 550 Hz                |
| 1 | FTB2003                     | .26 - 4     | 1 - 15 | .07 - 4   | .25 - 15 | 17400       | 4600       | 76 - 1150 Hz               |
|   | FTB2004                     | .26 - 4     | 1 - 15 | .07 - 5.3 | .25 - 20 | 8300        | 2200       | 37 - 550 Hz                |
| İ | FTB2005                     | .53 - 7.9   | 2 - 30 | .13 - 7.9 | .5 - 30  | 3800        | 1000       | 37 - 550 Hz<br>33 - 500 Hz |

# Electrical/Output Signal (\_□\_)


The output signal is a square wave signal, whose frequency varies linearly with flow rate. An external pull-up resistor 'user-supplied) is required to insure that the open collector will sink less than 50 mA.

Cable and connector can be ordered as follows:

Part #FTB173941: 3 Ft. Cable Assembly Part #FTB173942: 10 Ft. Cable Assembly

These assemblies use:

(3) Amp Contact #927936-2 and (1) HSU Plastic Case: #03-B1663

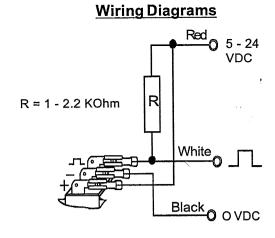

#### Important Points!

Product must be maintained and installed in strict accordance with the National Electrical Code and product technical brochure and instruction bulletin. Failure to observe this warning could result in serious injuries or damages.

Pressure and temperature limitations shown on individual catalog pages and drawings for the specified flow sensors must

Selection of materials for compatibility with the media is critical to the life and operation of these flow sensors. Take care in the proper selection of materials of construction; particularly wetted materials.

Flow sensors have been designed to resist shock and vibration: however, shock and vibration should be minimized.

Liquid media containing particulate and/or debris should be filtered to ensure proper operation of these products.

Flow sensors must not be field repaired.

Physical damage sustained by the product may render it unserviceable.

### Servicing USA and Canada: Call OMEGA Toll Free

## OMEGA Engineering. Inc.

One Omega Drive, Box 4047 Stamford, CT 06907-0047 U.S.A. Headquarters: (203) 359-1660 Sales: 1-800-826-6342 / 1-800- TC-OMEGA

Customer Service: 1-800-622-2378/1-800-622-BEST Engineering: 1-800-872-9436 / 1-800-USA-WHEN

FAX: (203) 359-7700 TELEX: 996404 EASYLINK: 62968934 CABLE: OMEGA

Servicing Europe: United Kingdom Sales and Distribution Center

#### OMEGA Technologies Ltd.

P.o. Box 1, Broughton Astley, Leicestershire LE9 6XR, England Telephone: (0455) 285520 FAX: (0455) 283912



#### WARRANTY

IEGA warrants this unit to be free of defects in materials and workmanship and to give satisfactory service for a period of 13 months from date of purchase. OMEGA Warranty adds an additional e(1) month grace period to the normal one (1) year product warranty to cover handling and shipping time. This ensures that our customers receive maximum coverage on each product. If the unit suld malfunction, it must be returned to the factory for evaluation. Our Customer Service Department will issue an Authorized Return (AR) number immediately upon phone or written request. on examination by OMEGA, if the unit is found to be defective it will be repaired or replaced at no charge. However, this WARRANTY is VOID if the unit shows evidence of having been tampered th or shows evidence of being damaged as a result of excessive corrosion; or current, heat, moisture or vibration; improper specification; misapplication; misuse or other erating conditions outside of OMEGA's control. Components which wear or which are damaged by misuse are not warranted. These include contact points, fuses, and triacs.

We are glad to offer suggestions on the use of our various products. Nevertheless OMEGA only warrants that the parts manufactured by it will be as specified and free of defects.

// MEGA MAKES NO OTHER WARRANTIES OR REPRESENTATIONS OF ANY KIND WHATSOEVER, EXPRESSED OR IMPLIED. EXCEPT THAT OF TITLE AND ALL IMPLIED ARRANTIES INCLUDING ANY WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED.

MITATION OF LIABILITY: The remedies of buyer set forth herein are exclusive and the total liability of OMEGA with respect to this order, whether based on contract. warranty, gligence, indemnification, strict liability or otherwise, shall not exceed the purchase price of the component upon which liability is based. In no event shall OMEGA be liable for asequential, incidental or special damages.

ery precaution for accuracy has been taken in the preparation of this manual, however, OMEGA ENGINEERING, INC. neither assumes responsibility for any omissions or errors that may appear

sumes liability for any damages that result from the use of the products in accordance with the information contained in the manual.

## RETURN REQUESTS / INQUIRIES

rect all warranty and repair requests/inquiries to the OMEGA ENGINEERING Customer Service Department. Call toll free in the USA and Canada: 1-800-622-2378, FAX: 203-359-7811; ernational:203-359-1660,FAX: 203-359-7807.

FORE RETURNING ANY PRODUCT(S) TO OMEGA, <u>YOU MUST OBTAIN AN AUTHORIZED RETURN (AR) NUMBER</u> FROM OUR CUSTOMER SERVICE DEPARTMENT (IN ORDER TO AVOID

OCESSING DELAYS). e assigned AR number should then be marked on the outside of the return package and on any correspondence. Please have the following information available BEFORE contacting OMEGA:

1. P.O. number under which the product was PURCHASED,

2. Model and serial number of the product, and

3. Repair instructions and/or specific problems you are having with the product.

1EGA's policy is to make running changes, not model changes, whenever an improvement is possible. That way our customers get the latest in technology and engineering. OMEGA is a registered trademark of OMEGA GINEERING, INC

Copyright 1992 OMEGA ENGINEERING, INC. All rights reserved Including illustrations. Nothing in this manual may be reproduced in any manner, either wholly or in part for any purpose whatsoever without written Printed in U.S.A. mission from OMEGA ENGINEERING, INC P/N 197068