

9

Object-Oriented Programming: Inheritance



OBJECTIVES

In this chapter you will learn:

- How inheritance promotes software reusability.
- The notions of superclasses and subclasses.
- To use keyword `extends` to create a class that inherits attributes and behaviors from another class.
- To use access modifier `protected` to give subclass methods access to superclass members.
- To access superclass members with `super`.
- How constructors are used in inheritance hierarchies.
- The methods of class `Object`, the direct or indirect superclass of all classes in Java.



9.1 Introduction

- **Inheritance**

- **Software reusability**
- **Create new class from existing class**
 - **Absorb existing class's data and behaviors**
 - **Enhance with new capabilities**
- **Subclass extends superclass**
 - **Subclass**
 - **More specialized group of objects**
 - **Behaviors inherited from superclass**
 - **Can customize**
 - **Additional behaviors**



9.1 Introduction (Cont.)

- **Class hierarchy**
 - **Direct superclass**
 - **Inherited explicitly (one level up hierarchy)**
 - **Indirect superclass**
 - **Inherited two or more levels up hierarchy**
 - **Single inheritance**
 - **Inherits from one superclass**
 - **Multiple inheritance**
 - **Inherits from multiple superclasses**
 - **Java does not support multiple inheritance**



9.2 Superclasses and subclasses

- **Superclasses and subclasses**
 - **Object of one class “is an” object of another class**
 - **Example: Rectangle is quadrilateral.**
 - **Class Rectangle inherits from class Quadrilateral**
 - **Quadrilateral : superclass**
 - **Rectangle: subclass**
 - **Superclass typically represents larger set of objects than subclasses**
 - **Example:**
 - **superclass: Vehicle**
 - **Cars, trucks, boats, bicycles, ...**
 - **subclass: Car**
 - **Smaller, more-specific subset of vehicles**



Fig. 9.1 | More Inheritance examples.

Superclass	Subclasses
Student	GraduateStudent, UndergraduateStudent
Shape	Circle, Triangle, Rectangle
Loan	CarLoan, HomeImprovementLoan, MortgageLoan
Employee	Faculty, Staff
BankAccount	CheckingAccount, SavingsAccount



9.2 Superclasses and subclasses (Cont.)

- **Inheritance hierarchy**

- **Inheritance relationships: tree-like hierarchy structure**

- **Each class becomes**

- **superclass**

- **Supply members to other classes**

OR

- **subclass**

- **Inherit members from other classes**



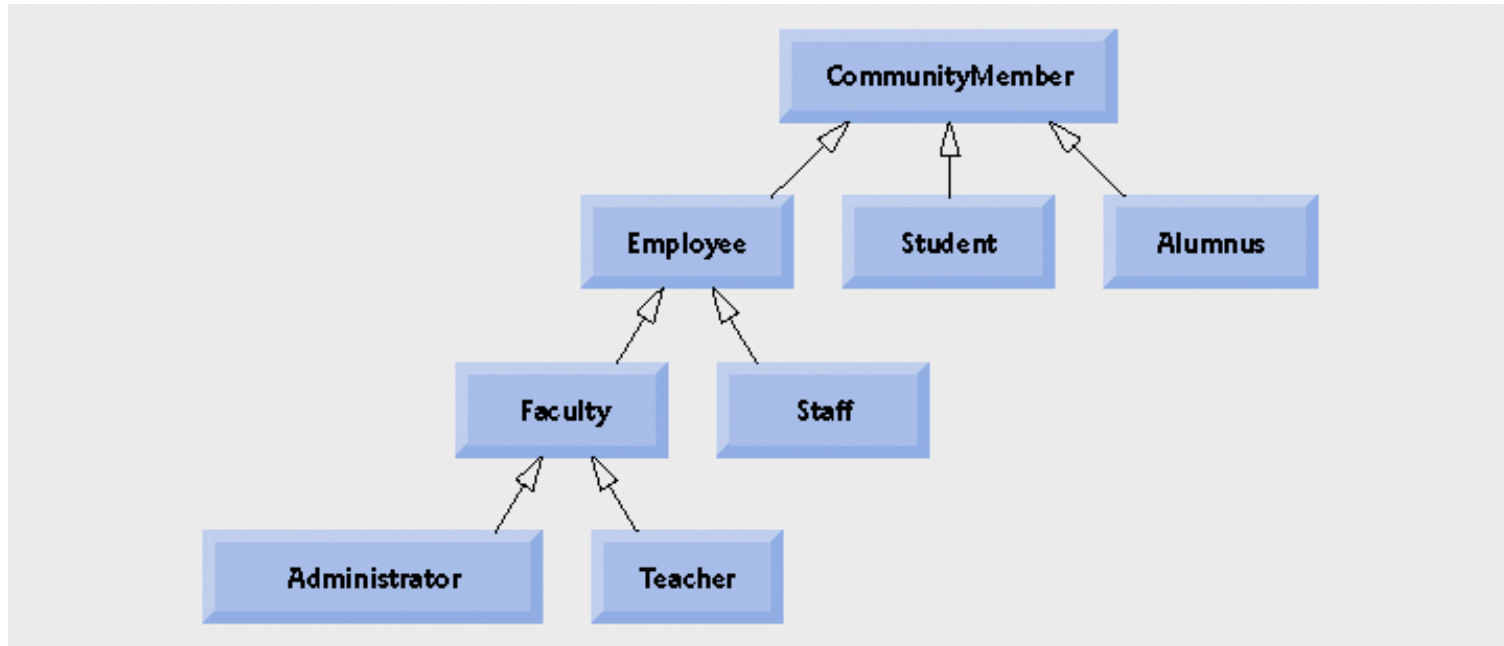


Fig. 9.2 | Inheritance hierarchy for university CommunityMembers



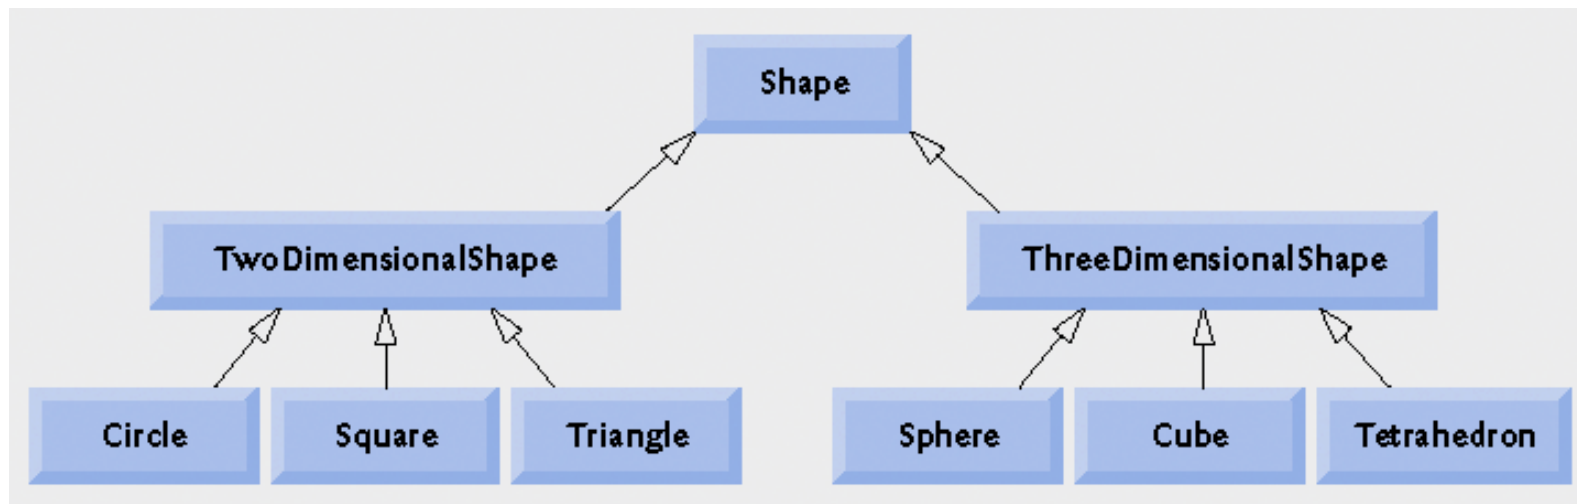


Fig. 9.3 | Inheritance hierarchy for Shapes.



9.3 protected Members

- **protected access**
 - **Intermediate level of protection between public and private**
 - **protected members accessible by**
 - **superclass members**
 - **subclass members**
 - **Class members in the same package**
 - **Subclass access to superclass member**
 - **Keyword super and a dot (.)**



Software Engineering Observation 9.1

Methods of a subclass cannot directly access private members of their superclass. A subclass can change the state of private superclass instance variables only through non-private methods provided in the superclass and inherited by the subclass.



Software Engineering Observation 9.2

Declaring private instance variables helps programmers test, debug and correctly modify systems. If a subclass could access its superclass's private instance variables, classes that inherit from that subclass could access the instance variables as well. This would propagate access to what should be private instance variables, and the benefits of information hiding would be lost.



9.4 Relationship between Superclasses and Subclasses

- **Superclass and subclass relationship**

- **Example:**

- Commi ssi onEmpl oyee/BasePI usCommi ssi onEmpl oyee
inheritance hierarchy

- **Commi ssi onEmpl oyee**

- **First name, last name, SSN, commission rate, gross sale amount**

- **BasePI usCommi ssi onEmpl oyee**

- **First name, last name, SSN, commission rate, gross sale amount**

- **Base salary**



9.4.1 Creating and Using a CommissionEmployee Class

- **Class CommissionEmployee**
 - **Extends class Object**
 - **Keyword extends**
 - **Every class in Java extends an existing class**
 - **Except Object**
 - **Every class inherits Object's methods**
 - **New class implicitly extends Object**
 - **If it does not extend another class**



Software Engineering Observation 9.3

The Java compiler sets the superclass of a class to Object when the class declaration does not explicitly extend a superclass.



Outline

```

1 // Fig. 9.4: Commi ssi onEmpl oyee. j ava
2 // Commi ssi onEmpl oyee cl ass represents a commi ssi on empl
3
4 public class Commi ssi onEmpl oyee extends Object
5 {
6     private String firstName;
7     private String lastName;
8     private String soci al Securi tyNumber;
9     private double grossSal es; // gross weekl y sal es
10    private double commi ssi onRate; // commi ssi on percent
11
12    // five-argument constructor
13    public Commi ssi onEmpl oyee( String first, String last, String ssn,
14        double sal es, double rate )
15    {
16        // implicit call to Object constructor occurs here
17        firstName = first;
18        lastName = last;
19        soci al Securi tyNumber = ssn;
20        setGrossSal es( sal es ); // validate and store gross sal es
21        setCommi ssi onRate( rate ); // validate and store commi ssi on rate
22    } // end five-argument Commi ssi onEmpl oyee constructor
23
24    // set first name
25    public void setFi rstName( String first )
26    {
27        firstName = first;
28    } // end method setFi rstName
29

```

Declare private instance variables

Class Commi ssi onEmpl oyee extends class Object

Implicit call to Object constructor

Initialize instance variables

Invoke methods setGrossSal es and setCommi ssi onRate to validate data

Commi ssi onEmpl oyee
. j ava

(1 of 4)

Line 4

Lines 6-10

Line 16

Lines 20-21



Outline

Commi ssi onEmpl oyee
.j ava

(2 of 4)

```
30 // return first name
31 public String getFirstName()
32 {
33     return firstName;
34 } // end method getFirstName
35
36 // set last name
37 public void setLastName( String last )
38 {
39     lastName = last;
40 } // end method setLastName
41
42 // return last name
43 public String getLastName()
44 {
45     return lastName;
46 } // end method getLastName
47
48 // set social security number
49 public void setSocialSecurityNumber( String ssn )
50 {
51     socialSecurityNumber = ssn; // should validate
52 } // end method setSocialSecurityNumber
53
54 // return social security number
55 public String getSocialSecurityNumber()
56 {
57     return socialSecurityNumber;
58 } // end method getSocialSecurityNumber
59
```



Outline

Commi ssi onEmpl oye
.j ava

(3 of 4)

Lines 85-88

```
60 // set gross sales amount
61 public void setGrossSales( double sales )
62 {
63     grossSales = ( sales < 0.0 ) ? 0.0 : sales;
64 } // end method setGrossSales
65
66 // return gross sales amount
67 public double getGrossSales()
68 {
69     return grossSales;
70 } // end method getGrossSales
71
72 // set commission rate
73 public void setCommissionRate( double rate )
74 {
75     commissionRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
76 } // end method setCommissionRate
77
78 // return commission rate
79 public double getCommissionRate()
80 {
81     return commissionRate;
82 } // end method getCommissionRate
83
84 // calculate earnings
85 public double earnings()
86 {
87     return commissionRate * grossSales;
88 } // end method earnings
89
```

Calculate earnings



Outline

```
90 // return String representation of CommissionEmployee object
91 public String toString()
92 {
93     return String.format( "%s: %s %s\n%s: %s\n%s: %s\n%s: %s\n",
94         "commission employee", firstName, lastName,
95         "social security number", socialSecurityNumber,
96         "gross sales", grossSales,
97         "commission rate", commissionRate );
98 } // end method toString
99 } // end class CommissionEmployee
```

Override method toString
of class Object

CommissionEmployee
.java

(4 of 4)

Lines 91-98



Common Programming Error 9.1

It is a syntax error to override a method with a more restricted access modifier—a public method of the superclass cannot become a protected or private method in the subclass; a protected method of the superclass cannot become a private method in the subclass. Doing so would break the “is-a” relationship in which it is required that all subclass objects be able to respond to method calls that are made to public methods declared in the superclass.(cont...)



Common Programming Error 9.1

If a public method could be overridden as a protected or private method, the subclass objects would not be able to respond to the same method calls as superclass objects. Once a method is declared public in a superclass, the method remains public for all that class's direct and indirect subclasses.



Outline

1 // Fig. 9.5: Commi ssi onEmpl oyeetest. java

2 // Testi ng cl ass Commi ssi onEmpl oyeetest.

4 public class Commi ssi onEmpl oyeetest

5 {

6 public static void main(String args[])

7 {

8 // i nstanti ate Commi ssi onEmpl oyeetest object

9 Commi ssi onEmpl oyeetest empl oyeetest = new Commi ssi onEmpl oyeetest(
10 "Sue", "Jones", "222-22-2222", 10000, .06);

12 // get commi ssi on empl oyeetest data

13 System.out.println(

14 "Empl oyeetest i nformati on obtai ned by get methods: \n");

15 System.out.printf("%s %s\n", "empl oyeetest.getFirstNa me()",
16 empl oyeetest.getFirstNa me());

17 System.out.printf("%s %s\n", "empl oyeetest.getLastNa me()",
18 empl oyeetest.getLastNa me());

19 System.out.printf("%s %s\n", "Soci al securi ty number i s",
20 empl oyeetest.getSoci al Securi tyNumber());

21 System.out.printf("%s %.2f\n", "Gross sal es i s",
22 empl oyeetest.getGrossSal es());

23 System.out.printf("%s %.2f\n", "Commi ssi on rate i s",
24 empl oyeetest.getCommi ssi onRate());

26 empl oyeetest.setGrossSal es(500); // set gross sal es

27 empl oyeetest.setCommi ssi onRate(.1); // set commi ssi on rate

Instanti ate Commi ssi onEmpl oyeetest object

Commi ssi onEmpl oyeetest
Test. java

(1 of 2)

Lines 9-10

Lines 15-25

Use Commi ssi onEmpl oyeetest's *get* methods
to retrie ve the object's i nstance vari able values

26-27

Use Commi ssi onEmpl oyeetest's *set* methods
to change the object's i nstance vari able values



```

29     System.out.printf( "\n%s: \n\n%s\n",
30         "Updated employee information obtained by toString", employee );
31 } // end main
32 } // end class CommissionEmployeeTest

```

Outline

Implicitly call object's
toString method

onEmployee

Employee information obtained by get methods:

```

First name is Sue
Last name is Jones
Social security number is 222-22-2222
Gross sales is 10000.00
Commission rate is 0.06

```

Updated employee information obtained by toString:

```

commission employee: Sue Jones
social security number: 222-22-2222
gross sales: 500.00
commission rate: 0.10

```

Test.java

(2 of 2)

Line 30

Program output



9.4.2 Creating a BasePlusCommissionEmployee Class without Using Inheritance

- **Class BasePlusCommissionEmployee**
 - **Implicitly extends Object**
 - **Much of the code is similar to CommissionEmployee**
 - **private instance variables**
 - **public methods**
 - **constructor**
 - **Additions**
 - **private instance variable baseSalary**
 - **Methods setBaseSalary and getBaseSalary**



Outline

BasePlusCommissionEmployee.java

```

1 // Fig. 9.6: BasePlusCommissionEmployee.java
2 // BasePlusCommissionEmployee class represents an employee that receives
3 // a base salary in addition to commission.
4
5 public class BasePlusCommissionEmployee
6 {
7     private String firstName;
8     private String lastName;
9     private String socialSecurityNumber;
10    private double grossSales; // gross weekly sales
11    private double commissionRate; // commission percentage
12    private double baseSalary; // base salary per week
13
14    // six-argument constructor
15    public BasePlusCommissionEmployee( String first, String last,
16        String ssn, double sales, double rate, double salary )
17    {
18        // implicit call to Object constructor occurs here
19        firstName = first;
20        lastName = last;
21        socialSecurityNumber = ssn;
22        setGrossSales( sales ); // validate and store
23        setCommissionRate( rate ); // validate and store commission rate
24        setBaseSalary( salary ); // validate and store base salary
25    } // end six-argument BasePlusCommissionEmployee constructor
26

```

Add instance variable baseSalary

Line 12

Line 24

Use method setBaseSalary
to validate data



Outline

BasePlusCommissionEmployee.java

(2 of 4)

```
27 // set first name
28 public void setFirstName( String first )
29 {
30     firstName = first;
31 } // end method setFirstName
32
33 // return first name
34 public String getFirstName()
35 {
36     return firstName;
37 } // end method getFirstName
38
39 // set last name
40 public void setLastName( String last )
41 {
42     lastName = last;
43 } // end method setLastName
44
45 // return last name
46 public String getLastName()
47 {
48     return lastName;
49 } // end method getLastName
50
51 // set social security number
52 public void setSocialSecurityNumber( String ssn )
53 {
54     socialSecurityNumber = ssn; // should validate
55 } // end method setSocialSecurityNumber
56
```



Outline

BasePlusCommission
Employee.java

(3 of 4)

```
57 // return social security number
58 public String getSocialSecurityNumber()
59 {
60     return socialSecurityNumber;
61 } // end method getSocialSecurityNumber
62
63 // set gross sales amount
64 public void setGrossSales( double sales )
65 {
66     grossSales = ( sales < 0.0 ) ? 0.0 : sales;
67 } // end method setGrossSales
68
69 // return gross sales amount
70 public double getGrossSales()
71 {
72     return grossSales;
73 } // end method getGrossSales
74
75 // set commission rate
76 public void setCommissionRate( double rate )
77 {
78     commissionRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
79 } // end method setCommissionRate
80
81 // return commission rate
82 public double getCommissionRate()
83 {
84     return commissionRate;
85 } // end method getCommissionRate
86
```



Outline

BasePlusCommissionEmployee.java

(4 of 4)

Lines 88-91

Lines 94-97

Line 102

Lines 108-113

```

87 // set base salary
88 public void setBaseSalary( double salary )
89 {
90     baseSalary = ( salary < 0.0 ) ? 0.0 : salary;
91 } // end method setBaseSalary
92
93 // return base salary
94 public double getBaseSalary()
95 {
96     return baseSalary;
97 } // end method getBaseSalary
98
99 // calculate earnings
100 public double earnings()
101 {
102     return baseSalary + ( commissionRate * grossSales );
103 } // end method earnings
104
105 // return String representation of BasePlusCommissionEmployee
106 public String toString()
107 {
108     return String.format(
109         "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f\n%s: %.2f",
110         "base-salaried commission employee", firstName, lastName,
111         "social security number", socialSecurityNumber,
112         "gross sales", grossSales, "commission rate",
113         "base salary", baseSalary );
114 } // end method toString
115 } // end class BasePlusCommissionEmployee

```

Method setBaseSalary validates data and sets instance variable baseSalary

Method getBaseSalary returns the value of instance variable baseSalary

Update method earnings to calculate the earnings of a base-salaried commission employee

Update method toString to display base salary



Outline

```

1 // Fig. 9.7: BasePlusCommissionEmployeeTest.java
2 // Testing class BasePlusCommissionEmployee.
3
4 public class BasePlusCommissionEmployeeTest
5 {
6     public static void main( String args[] )
7     {
8         // instantiate BasePlusCommissionEmployee object
9         BasePlusCommissionEmployee empl =
10            new BasePlusCommissionEmployee(
11                "Bob", "Lewis", "333-33-3333", 5000, .04, 300 );
12
13        // get base-salaried commission employee data
14        System.out.println(
15            "Employee information obtained by get methods: \n" );
16        System.out.printf( "%s %s\n",
17            empl.getFirstName() );
18        System.out.printf( "%s %s\n",
19            empl.getLastName() );
20        System.out.printf( "%s %s\n", "Social security number is",
21            empl.getSocialSecurityNumber() );
22        System.out.printf( "%s %.2f\n", "Gross sales is",
23            empl.getGrossSales() );
24        System.out.printf( "%s %.2f\n", "Commission rate is",
25            empl.getCommissionRate() );
26        System.out.printf( "%s %.2f\n", "Base salary is",
27            empl.getBaseSalary() );
28

```

Instantiate BasePlusCommissionEmployee object

(1 of 2)

Line 9-11

Lines 16-27

Use BasePlusCommissionEmployee's *get* methods to retrieve the object's instance variable values



Outline

```

29     empl oye e. setBaseSal ary( 1000 ); // set base sal ary
30
31     System. out. printf( "\n%s: \n\n%s\n",
32         "Updated empl oye e i nformation obt a
33         empl oye e. toString() );
34 } // end main
35 } // end class BasePI usCommi ssi onEmpl o

```

Use BasePI usCommi ssi onEmpl oye e's setBaseSal ary methods to set base salary

Explicitly call object's toString method

BasePI usCommi ssi on
Empl oye eTest. j ava

(2 of 2)

Line 29

Line 33

Program output

Employee i nformation obtained by get met

```

First name is Bob
Last name is Lewi s
Social security number is 333-33-3333
Gross sales is 5000.00
Commi ssi on rate is 0.04
Base salary is 300.00

```

Updated empl oye e i nformation obtained by toString:

```

base-sal ari ed commi ssi on empl oye e: Bob Lewi s
social security number: 333-33-3333
gross sales: 5000.00
commi ssi on rate: 0.04
base salary: 1000.00

```



Software Engineering Observation 9.4

Copying and pasting code from one class to another can spread errors across multiple source code files. To avoid duplicating code (and possibly errors), use inheritance, rather than the “copy-and-paste” approach, in situations where you want one class to “absorb” the instance variables and methods of another class.



Software Engineering Observation 9.5

With inheritance, the common instance variables and methods of all the classes in the hierarchy are declared in a superclass. When changes are required for these common features, software developers need only to make the changes in the superclass—subclasses then inherit the changes. Without inheritance, changes would need to be made to all the source code files that contain a copy of the code in question.



9.4.3 Creating a CommissionEmployee - BasePlusCommissionEmployee Inheritance Hierarchy

- **Class BasePlusCommissionEmployee2**
 - Extends class CommissionEmployee
 - Is a CommissionEmployee
 - Has instance variable baseSalary
 - Inherits public and protected members
 - Constructor not inherited



Outline

```

1 // Fig. 9.8: BasePlusCommissionEmployee2.java
2 // BasePlusCommissionEmployee2 inherits from class CommissionEmployee.
3
4 public class BasePlusCommissionEmployee2 extends CommissionEmployee
5 {
6     private double baseSalary; // base salary per week
7
8     // six-argument constructor
9     public BasePlusCommissionEmployee2( String first, String last,
10         String ssn, double sales, double rate, double salary )
11     {
12         // explicit call to superclass CommissionEmployee constructor
13         super( first, last, ssn, sales, rate );
14
15         setBaseSalary( amount ); // validate and store base salary
16     } // end six-argument BasePlusCommissionEmployee2 constructor
17
18     // set base salary
19     public void setBaseSalary( double salary )
20     {
21         baseSalary = ( salary < 0.0 ) ? 0.0 : salary;
22     } // end method setBaseSalary
23

```

BasePlusCommissionEmployee2.java

Class BasePlusCommissionEmployee2 is a subclass of CommissionEmployee

Line 4

Line 13

Invoke the superclass constructor using the superclass constructor call syntax



Outline

```

24 // return base salary
25 public double getBaseSalary()
26 {
27     return baseSalary;
28 } // end method getBaseSalary

```

BasePlusCommission

```

30 // calculate earnings
31 public double earnings()
32 {
33     // not allowed: commissionRate and grossSales private in superclass
34     return baseSalary + ( commissionRate * grossSales );
35 } // end method earnings

```

Compiler generates errors because superclass's instance variable commissionRate and grossSales are private

(2 of 3)

Line 34

```

36
37 // return String representation
38 public String toString()
39 {
40     // not allowed: attempts to access private variables
41     return String.format(
42         "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f\n%s: %.2f",
43         "base-salaried commission employee", firstName, lastName,
44         "social security number", socialSecurityNumber,
45         "gross sales", grossSales, "commission rate", commissionRate,
46         "base salary", baseSalary );
47 } // end method toString
48 } // end class BasePlusCommissionEmployee2

```

Compiler generates errors because superclass's instance variable firstName, lastName, socialSecurityNumber, grossSales and commissionRate are private

Lines 41-46



Outline

BasePlusCommissionEmployee.java: 34: commissionRate has private access in
Employee

(3 of 3)

Compiler generated
errors

```
BasePlusCommissionEmployee.java: 34: commissionRate has private access in
CommissionEmployee
    return baseSalary + ( commissionRate * grossSales );
                          ^
```

```
BasePlusCommissionEmployee.java: 34: grossSales has private access in
CommissionEmployee
    return baseSalary + ( commissionRate * grossSales );
                          ^
```

```
BasePlusCommissionEmployee.java: 43: firstName has private access in
CommissionEmployee
    "base-salaried commission employee", firstName, lastName,
                                         ^
```

```
BasePlusCommissionEmployee.java: 43: lastName has private access in
CommissionEmployee
    "base-salaried commission employee", firstName, lastName,
                                         ^
```

```
BasePlusCommissionEmployee.java: 44: socialSecurityNumber has private access in
CommissionEmployee
    "social security number", socialSecurityNumber,
                              ^
```

```
BasePlusCommissionEmployee.java: 45: grossSales has private access in
CommissionEmployee
    "gross sales", grossSales, "commission rate", commissionRate,
                  ^
```

```
BasePlusCommissionEmployee.java: 45: commissionRate has private access in
CommissionEmployee
    "gross sales", grossSales, "commission rate", commissionRate,
                  ^
```

7 errors



Common Programming Error 9.2

A compilation error occurs if a subclass constructor calls one of its superclass constructors with arguments that do not match exactly the number and types of parameters specified in one of the superclass constructor declarations.



9.4.4 Commi ssi onEmpl oyee- BasePl usCommi ssi onEmpl oyee Inheritance Hierarchy Using protected Instance Variables

- **Use protected instance variables**
 - Enable class BasePl usCommi ssi onEmpl oyee to directly access superclass instance variables
 - Superclass's protected members are inherited by all subclasses of that superclass



Outline

Commi ssi on

Empl oyee2. j ava

(1 of 4)

Line 6-10

```

1 // Fi g. 9. 9: Commi ssi onEmpl oyee2. j ava
2 // Commi ssi onEmpl oyee2 cl ass represents a commi ssi on empl oyee.
3
4 public class Commi ssi onEmpl oyee2
5 {
6     protected String fi rstName;
7     protected String l astName;
8     protected String soci al Securi tyNumber;
9     protected double grossSal es; // gross weekl y sal es
10    protected double commi ssi onRate; // commi ssi on percentage
11
12    // fi ve-argument constructor
13    public Commi ssi onEmpl oyee2( String fi rst, String l ast, String ssn,
14        double sal es, double rate )
15    {
16        // impl icit call to Object constructor occurs here
17        fi rstName = fi rst;
18        l astName = l ast;
19        soci al Securi tyNumber = ssn;
20        setGrossSal es( sal es ); // val idate and store gross sal es
21        setCommi ssi onRate( rate ); // val idate and store commi ssi on rate
22    } // end fi ve-argument Commi ssi onEmpl oyee2 constructor
23
24    // set fi rst name
25    public void setFi rstName( String fi rst )
26    {
27        fi rstName = fi rst;
28    } // end method setFi rstName
29

```

Declare protected
instance variables



Outline

Commi ssi on

Empl oyee2. j ava

(2 of 4)

```
30 // return first name
31 public String getFirstName()
32 {
33     return firstName;
34 } // end method getFirstName
35
36 // set last name
37 public void setLastName( String last )
38 {
39     lastName = last;
40 } // end method setLastName
41
42 // return last name
43 public String getLastName()
44 {
45     return lastName;
46 } // end method getLastName
47
48 // set social security number
49 public void setSocialSecurityNumber( String ssn )
50 {
51     socialSecurityNumber = ssn; // should validate
52 } // end method setSocialSecurityNumber
53
54 // return social security number
55 public String getSocialSecurityNumber()
56 {
57     return socialSecurityNumber;
58 } // end method getSocialSecurityNumber
59
```



Outline

Commi ssi on

Empl oyee2. j ava

(3 of 4)

```
60 // set gross sales amount
61 public void setGrossSal es( double sal es )
62 {
63     grossSal es = ( sal es < 0.0 ) ? 0.0 : sal es;
64 } // end method setGrossSal es
65
66 // return gross sales amount
67 public double getGrossSal es()
68 {
69     return grossSal es;
70 } // end method getGrossSal es
71
72 // set commi ssi on rate
73 public void setCommi ssi onRate( double rate )
74 {
75     commi ssi onRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
76 } // end method setCommi ssi onRate
77
78 // return commi ssi on rate
79 public double getCommi ssi onRate()
80 {
81     return commi ssi onRate;
82 } // end method getCommi ssi onRate
83
84 // calculate earni ngs
85 public double earni ngs()
86 {
87     return commi ssi onRate * grossSal es;
88 } // end method earni ngs
89
```



```
90 // return String representation of CommissionEmployee2 object
91 public String toString()
92 {
93     return String.format( "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f",
94         "commission employee", firstName, lastName,
95         "social security number", socialSecurityNumber,
96         "gross sales", grossSales,
97         "commission rate", commissionRate );
98 } // end method toString
99 } // end class CommissionEmployee2
```

Outline

Commission

Employee2.java

(4 of 4)



Outline

BasePlusCommissionEmployee3.java

```

1 // Fig. 9.10: BasePlusCommissionEmployee3.java
2 // BasePlusCommissionEmployee3 inherits from CommissionEmployee2 and has
3 // access to CommissionEmployee2's protected members.
4
5 public class BasePlusCommissionEmployee3 extends CommissionEmployee2
6 {
7     private double baseSalary; // base salary per week
8
9     // six-argument constructor
10    public BasePlusCommissionEmployee3( String first, String last,
11        String ssn, double sales, double rate, double salary )
12    {
13        super( first, last, ssn, sales, rate );
14        setBaseSalary( salary ); // validate and store base salary
15    } // end six-argument BasePlusCommissionEmployee3 constructor
16
17    // set base salary
18    public void setBaseSalary( double salary )
19    {
20        baseSalary = ( salary < 0.0 ) ? 0.0 : salary;
21    } // end method setBaseSalary
22
23    // return base salary
24    public double getBaseSalary()
25    {
26        return baseSalary;
27    } // end method getBaseSalary
28

```

Must call superclass's constructor of 2)

Line 13



Outline

```

29 // calculate earnings
30 public double earnings()
31 {
32     return baseSalary + ( commissionRate * grossSales );
33 } // end method earnings
34
35 // return String representation of BasePlusCommissionEmployee3
36 public String toString()
37 {
38     return String.format(
39         "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f\n%s: %.2f",
40         "base-salaried commission employee", firstName, lastName,
41         "social security number", socialSecurityNumber,
42         "gross sales", grossSales, "commission rate", commissionRate,
43         "base salary", baseSalary );
44 } // end method toString
45 } // end class BasePlusCommissionEmployee3

```

Directly access
superclass's protected
instance variables

BasePlusCommissionEmployee3.java

Line 32

Lines 38-43



```

1 // Fig. 9.11: BasePlusCommissionEmployeeTest3.java
2 // Testing class BasePlusCommissionEmployee3.
3
4 public class BasePlusCommissionEmployeeTest3
5 {
6     public static void main( String args[] )
7     {
8         // instantiate BasePlusCommissionEmployee3 object
9         BasePlusCommissionEmployee employee =
10            new BasePlusCommissionEmployee3(
11                "Bob", "Lewis", "333-33-3333", 5000, .04, 300 );
12
13        // get base-salaried commission employee data
14        System.out.println(
15            "Employee information obtained by get methods: \n" );
16        System.out.printf( "%s %s\n", "First name is",
17            employee.getFirstName() );
18        System.out.printf( "%s %s\n", "Last name is",
19            employee.getLastName() );
20        System.out.printf( "%s %s\n", "Social security number is",
21            employee.getSocialSecurityNumber() );
22        System.out.printf( "%s %.2f\n", "Gross sales is",
23            employee.getGrossSales() );
24        System.out.printf( "%s %.2f\n", "Commission rate is",
25            employee.getCommissionRate() );
26        System.out.printf( "%s %.2f\n", "Base salary is",
27            employee.getBaseSalary() );
28

```

Outline

BasePlusCommissionEmployeeTest3.java

(1 of 2)



Outline

BasePlusCommissionEmployeeTest3.java

(2 of 2)

Program output

```
29     employee.setBaseSalary( 1000 ); // set base salary
30
31     System.out.printf( "\n%s: \n\n%s\n",
32         "Updated employee information obtained by toString",
33         employee.toString() );
34 } // end main
35 } // end class BasePlusCommissionEmployeeTest3
```

Employee information obtained by get methods:

```
First name is Bob
Last name is Lewis
Social security number is 333-33-3333
Gross sales is 5000.00
Commission rate is 0.04
Base salary is 300.00
```

Updated employee information obtained by toString:

```
base-salaried commission employee: Bob Lewis
social security number: 333-33-3333
gross sales: 5000.00
commission rate: 0.04
base salary: 1000.00
```



9.4.4 Commi ssi onEmpl oyee- BasePl usCommi ssi onEmpl oyee Inheritance Hierarchy Using protected Instance Variables (Cont.)

- **Using protected instance variables**
 - **Advantages**
 - subclasses can modify values directly
 - Slight increase in performance
 - Avoid set/get method call overhead
 - **Disadvantages**
 - No validity checking
 - subclass can assign illegal value
 - Implementation dependent
 - subclass methods more likely dependent on superclass implementation
 - superclass implementation changes may result in subclass modifications
 - Fragile (brittle) software



Software Engineering Observation 9.6

Use the protected access modifier when a superclass should provide a method only to its subclasses and other classes in the same package, but not to other clients.



Software Engineering Observation 9.7

Declaring superclass instance variables private (as opposed to protected) enables the superclass implementation of these instance variables to change without affecting subclass implementations.



Error-Prevention Tip 9.1

When possible, do not include protected instance variables in a superclass. Instead, include non-private methods that access private instance variables. This will ensure that objects of the class maintain consistent states.



9.4.5 Commi ssi onEmpl oyee- BasePl usCommi ssi onEmpl oyee Inheritance Hierarchy Using private Instance Variables

- **Reexamine hierarchy**
 - Use the best software engineering practice
 - Declare instance variables as *private*
 - Provide public *get* and *set* methods
 - Use *get* method to obtain values of instance variables



Outline

Commi ssi on

Empl oyee3. j ava

(1 of 4)

Lines 6-10

```

1 // Fig. 9.12: Commi ssi onEmpl oyee3. j ava
2 // Commi ssi onEmpl oyee3 cl ass represents a commi ssi on empl oyee.
3
4 public class Commi ssi onEmpl oyee3
5 {
6     private String firstName;
7     private String lastName;
8     private String socialSecurityNumber;
9     private double grossSales; // gross weekly sales
10    private double commissionRate; // commission percentage
11
12    // five-argument constructor
13    public Commi ssi onEmpl oyee3( String first, String last, String ssn,
14        double sales, double rate )
15    {
16        // implicit call to Object constructor occurs here
17        firstName = first;
18        lastName = last;
19        socialSecurityNumber = ssn;
20        setGrossSales( sales ); // validate and store gross sales
21        setCommissionRate( rate ); // validate and store commission rate
22    } // end five-argument Commi ssi onEmpl oyee3 constructor
23
24    // set first name
25    public void setFirstName( String first )
26    {
27        firstName = first;
28    } // end method setFirstName
29

```

Declare private
instance variables



Outline

Commi ssi on

Empl oyee3. j ava

(2 of 4)

```
30 // return first name
31 public String getFirstName()
32 {
33     return firstName;
34 } // end method getFirstName
35
36 // set last name
37 public void setLastName( String last )
38 {
39     lastName = last;
40 } // end method setLastName
41
42 // return last name
43 public String getLastName()
44 {
45     return lastName;
46 } // end method getLastName
47
48 // set social security number
49 public void setSocialSecurityNumber( String ssn )
50 {
51     socialSecurityNumber = ssn; // should validate
52 } // end method setSocialSecurityNumber
53
54 // return social security number
55 public String getSocialSecurityNumber()
56 {
57     return socialSecurityNumber;
58 } // end method getSocialSecurityNumber
59
```



Outline

Commi ssi on

Empl oyee3. j ava

(3 of 4)

```
60 // set gross sales amount
61 public void setGrossSales( double sales )
62 {
63     grossSales = ( sales < 0.0 ) ? 0.0 : sales;
64 } // end method setGrossSales
65
66 // return gross sales amount
67 public double getGrossSales()
68 {
69     return grossSales;
70 } // end method getGrossSales
71
72 // set commission rate
73 public void setCommissionRate( double rate )
74 {
75     commissionRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
76 } // end method setCommissionRate
77
78 // return commission rate
79 public double getCommissionRate()
80 {
81     return commissionRate;
82 } // end method getCommissionRate
83
```



Outline

```

84 // calculate earnings
85 public double earnings()
86 {
87     return getCommi ssi onRate() * getGrossSal es();
88 } // end method earnings
89
90 // return String representation of Commi ssi onEmpl oyee
91 public String toString()
92 {
93     return String.format( "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f",
94         "commi ssi on empl oyee", getFi rstName(), getLa stName(),
95         "soci al securi ty number", getSoci al Securi tyNumber(),
96         "gross sal es", getGrossSal es(),
97         "commi ssi on rate", getCommi ssi onRate() );
98 } // end method toString
99 } // end class Commi ssi onEmpl oyee3

```

Use *get* methods to obtain the values of instance variables

Commi ssi on

Empl oyee3. j ava

(4 of 4)

Line 87

Lines 94-97



Outline

```

1 // Fig. 9.13: BasePlusCommissionEmployee4.java
2 // BasePlusCommissionEmployee4 class inherits from CommissionEmployee3 and
3 // accesses CommissionEmployee3's private data via a CommissionEmployee3's
4 // public methods.
5
6 public class BasePlusCommissionEmployee4 extends CommissionEmployee3
7 {
8     private double baseSalary; // base salary per week
9
10    // six-argument constructor
11    public BasePlusCommissionEmployee4( String first, String last,
12        String ssn, double sales, double rate, double salary )
13    {
14        super( first, last, ssn, sales, rate );
15        setBaseSalary( salary ); // validate and store base salary
16    } // end six-argument BasePlusCommissionEmployee4 constructor
17
18    // set base salary
19    public void setBaseSalary( double salary )
20    {
21        baseSalary = ( salary < 0.0 ) ? 0.0 : salary;
22    } // end method setBaseSalary
23

```

Inherits from
CommissionEmployee3

BasePlusCommissionEmployee4.java



Outline

```

24 // return base salary
25 public double getBaseSalary()
26 {
27     return baseSalary;
28 } // end method getBaseSalary
29
30 // calculate earnings
31 public double earnings()
32 {
33     return getBaseSalary() + super.earnings();
34 } // end method earnings
35
36 // return String representation of BasePlusCommissionEmployee
37 public String toString()
38 {
39     return String.format( "%s %s\n%s: %.2f", "base-salaried",
40         super.toString(), "base salary", getBaseSalary() );
41 } // end method toString
42 } // end class BasePlusCommissionEmployee4

```

Invoke an overridden superclass method from a subclass

(2 of 2)

Use *get* methods to obtain the values of instance variables

Lines 40

Invoke an overridden superclass method from a subclass



Common Programming Error 9.3

When a superclass method is overridden in a subclass, the subclass version often calls the superclass version to do a portion of the work. Failure to prefix the superclass method name with the keyword `super` and a dot (`.`) separator when referencing the superclass's method causes the subclass method to call itself, creating an error called infinite recursion. Recursion, used correctly, is a powerful capability discussed in Chapter 15, Recursion.



Outline

```

1 // Fig. 9.14: BasePlusCommi ssi onEmplo yeeTest4. java
2 // Testi ng cl ass BasePl usCommi ssi onEmplo yee4.
3
4 public class BasePl usCommi ssi onEmplo yeeTest4
5 {
6     public static void main( String args[] )
7     {
8         // i nstanti ate BasePl usCommi ssi onEmplo yee4 obj ect
9         BasePl usCommi ssi onEmplo yee4 empl oye e =
10            new BasePl usCommi ssi onEmplo yee4(
11                "Bob", "Lewi s", "333-33-3333", 5000, .04, 300 );
12
13        // get base-sal ari ed commi ssi on empl oye e data
14        System. out. pri ntl n(
15            "Emplo yee i nformati on obtai ned by get methods: \n" );
16        System. out. pri ntf( "%s %s\n", "Fi rst name i s",
17            empl oye e. getFi rstName() );
18        System. out. pri ntf( "%s %s\n", "Last name i s",
19            empl oye e. getLast Name() );
20        System. out. pri ntf( "%s %s\n", "Soci al securi ty number i s",
21            empl oye e. get Soci al Securi ty Number() );
22        System. out. pri ntf( "%s %.2f\n", "Gross sal es i s",
23            empl oye e. getGross Sal es() );
24        System. out. pri ntf( "%s %.2f\n", "Commi ssi on rate i s",
25            empl oye e. getCommi ssi on Rate() );
26        System. out. pri ntf( "%s %.2f\n", "Base sal ary
27            empl oye e. getBase Sal ary() );
28

```

Create
BasePl usCommi ssi onEmplo yee4
obj ect.

Lines 9-11

Lines 16-25

Use i nheri ted *get* methods to
access i nheri ted pri vate
i nstance vari ables

Use BasePl usCommi ssi onEmplo yee4 *get*
method to access pri vate i nstance vari ables.



Outline

```

29  empl o yee. setBaseSal ary( 1000 ); // set base sal ary
30
31  System. out. printf( "\n%s: \n\n%s\n",
32      "Updated empl o yee information obtained
33      empl o yee. toString() );
34  } // end main
35 } // end class BasePl usCommi ssi onEmpl o yeeTest4

```

Use BasePl usCommi ssi onEmpl o yee4 set method to modify pri vate instance variable baseSal ary.

Empl o yeeTest4. j ava

Employee information obtained by get methods:

```

First name is Bob
Last name is Lewis
Social security number is 333-33-3333
Gross sales is 5000.00
Commission rate is 0.04
Base salary is 300.00

```

Updated employee information obtained by toString:

```

base-sal aried commi ssi on empl o yee: Bob Lewis
social security number: 333-33-3333
gross sales: 5000.00
commi ssi on rate: 0.04
base sal ary: 1000.00

```

(2 of 2)



9.5 Constructors in Subclasses

- **Instantiating subclass object**
 - **Chain of constructor calls**
 - **subclass constructor invokes superclass constructor**
 - **Implicitly or explicitly**
 - **Base of inheritance hierarchy**
 - **Last constructor called in chain is Object's constructor**
 - **Original subclass constructor's body finishes executing last**
 - **Example: CommisionEmployee3-BasePlusCommissionEmployee4 hierarchy**
 - **CommissionEmployee3 constructor called second last (last is Object constructor)**
 - **CommissionEmployee3 constructor's body finishes execution second (first is Object constructor's body)**



Software Engineering Observation 9.8

Java ensures that even if a constructor does not assign a value to an instance variable, the variable is still initialized to its default value (e.g., 0 for primitive numeric types, false for booleans, null for references).



Outline

Commi ssi onEmpl oye4
4. j ava

(1 of 4)

Lines 23-24

```

1 // Fig. 9.15: Commi ssi onEmpl oye4. j ava
2 // Commi ssi onEmpl oye4 cl ass represents a commi ssi on empl oye4.
3
4 public class Commi ssi onEmpl oye4
5 {
6     private String fir stName;
7     private String la stName;
8     private String soci al Securi tyNumber;
9     private double grossSal es; // gross weekly sal es
10    private double commi ssi onRate; // commi ssi on percentage
11
12    // five-argument constructor
13    public Commi ssi onEmpl oye4( String fir st, String la st, String ssn,
14        double sal es, double rate )
15    {
16        // implicit call to Object constructor occurs here
17        fir stName = fir st;
18        la stName = la st;
19        soci al Securi tyNumber = ssn;
20        setGrossSal es( sal es ); // validate an
21        setCommi ssi onRate( rate ); // validate
22
23        System.out.printf(
24            "\nCommi ssi onEmpl oye4 constructor: \n%s\n", thi s );
25    } // end five-argument Commi ssi onEmpl oye4 constructor
26

```

Constructor outputs message to demonstrate method call order.



Outline

Commi ssi onEmpl oye
4. j ava

(2 of 4)

```
27 // set first name
28 public void setFirstName( String first )
29 {
30     firstName = first;
31 } // end method setFirstName
32
33 // return first name
34 public String getFirstName()
35 {
36     return firstName;
37 } // end method getFirstName
38
39 // set last name
40 public void setLastName( String last )
41 {
42     lastName = last;
43 } // end method setLastName
44
45 // return last name
46 public String getLastName()
47 {
48     return lastName;
49 } // end method getLastName
50
51 // set social security number
52 public void setSocialSecurityNumber( String ssn )
53 {
54     socialSecurityNumber = ssn; // should validate
55 } // end method setSocialSecurityNumber
56
```



Outline

Commi ssi onEmpl oyee 4. j ava

(3 of 4)

```
57 // return social security number
58 public String getSocialSecurityNumber()
59 {
60     return socialSecurityNumber;
61 } // end method getSocialSecurityNumber
62
63 // set gross sales amount
64 public void setGrossSales( double sales )
65 {
66     grossSales = ( sales < 0.0 ) ? 0.0 : sales;
67 } // end method setGrossSales
68
69 // return gross sales amount
70 public double getGrossSales()
71 {
72     return grossSales;
73 } // end method getGrossSales
74
75 // set commission rate
76 public void setCommissionRate( double rate )
77 {
78     commissionRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
79 } // end method setCommissionRate
80
```



Outline

Commi ssi onEmpl oye e 4. j ava

(4 of 4)

```
81 // return commi ssi on rate
82 public double getCommi ssi onRate()
83 {
84     return commi ssi onRate;
85 } // end method getCommi ssi onRate
86
87 // calculate earni ngs
88 public double earni ngs()
89 {
90     return getCommi ssi onRate() * getGrossSal es();
91 } // end method earni ngs
92
93 // return String representati on of Commi ssi onEmpl oye e4 obj ect
94 public String toString()
95 {
96     return String.format( "%s: %s %s\n%s: %s\n%s: %.2f\n%s: %.2f",
97         "commi ssi on empl oye e", getFi rstName(), getLas tName(),
98         "soci al securi ty number", getSoci al Securi tyNumber(),
99         "gross sal es", getGrossSal es(),
100        "commi ssi on rate", getCommi ssi onRate() );
101 } // end method toString
102 } // end cl ass Commi ssi onEmpl oye e4
```



Outline

BasePI usCommi ssi onEmpl oyee5. j ava

(1 of 2)

Lines 15-16

```

1 // Fig. 9.16: BasePI usCommi ssi onEmpl oyee5. j ava
2 // BasePI usCommi ssi onEmpl oyee5 cl ass decl arati on.
3
4 public class BasePI usCommi ssi onEmpl oyee5 extends Commi ssi onEmpl oyee4
5 {
6     private double baseSal ary; // base sal ary per week
7
8     // six-argument constructor
9     public BasePI usCommi ssi onEmpl oyee5( String first, String last,
10         String ssn, double sales, double rate, double sal ary )
11     {
12         super( first, last, ssn, sales, rate );
13         setBaseSal ary( sal ary ); // validate a
14
15         System.out.printf(
16             "\nBasePI usCommi ssi onEmpl oyee5 constructor:\n%s\n", this );
17     } // end six-argument BasePI usCommi ssi onEmpl oyee5 constructor
18
19     // set base sal ary
20     public void setBaseSal ary( double sal ary )
21     {
22         baseSal ary = ( sal ary < 0.0 ) ? 0.0 : sal ary;
23     } // end method setBaseSal ary
24

```

Constructor outputs message to demonstrate method call order.



Outline

BasePlusCommissionEmployee5.java

(2 of 2)

```
25 // return base salary
26 public double getBaseSalary()
27 {
28     return baseSalary;
29 } // end method getBaseSalary
30
31 // calculate earnings
32 public double earnings()
33 {
34     return getBaseSalary() + super.earnings();
35 } // end method earnings
36
37 // return String representation of BasePlusCommissionEmployee5
38 public String toString()
39 {
40     return String.format( "%s %s\n%s: %.2f", "base-salaried",
41         super.toString(), "base salary", getBaseSalary() );
42 } // end method toString
43 } // end class BasePlusCommissionEmployee5
```



Outline

```

1 // Fig. 9.17: ConstructorTest.java
2 // Display order in which superclass and subclass constructors are called.
3
4 public class ConstructorTest
5 {
6     public static void main( String args[] )
7     {
8         Commi ssi onEmpl oyee4 empl oyee1 = new Commi ssi onEmpl oyee4(
9             "Bob", "Lewi s", "333-33-3333", 5000, .04 );
10
11        System.out. pri ntl n();
12        BasePI usCommi ssi onEmpl oyee5 empl oyee2 =
13            new BasePI usCommi ssi onEmpl oyee5(
14                "Li sa", "Jones", "555-55-5555", 2000, .06, 800 );
15
16        System.out. pri ntl n();
17        BasePI usCommi ssi onEmpl oyee5 empl oyee3 =
18            new BasePI usCommi ssi onEmpl oyee5(
19                "Mark", "Sands", "888-88-8888", 8000, .15, 2000 );
20    } // end main
21 } // end class ConstructorTest

```

Instantiate
Commi ssi onEmpl oyee4 object

.j ava

(1 of 2)

Instantiate two
BasePI usCommi ssi onEmpl oyee5
objects to demonstrate order of subclass
and superclass constructor method calls.



Outline

ConstructorTest

.java

(2 of 2)

Subclass

BasePlusCommissionEmployee5

constructor body executes after superclass
CommissionEmployee4's constructor
finishes execution.

CommissionEmployee4 constructor:
commission employee: Bob Lewis
social security number: 333-33-3333
gross sales: 5000.00
commission rate: 0.04

CommissionEmployee4 constructor:
base-salaried commission employee: Lisa Jones
social security number: 555-55-5555
gross sales: 2000.00
commission rate: 0.06
base salary: 0.00

BasePlusCommissionEmployee5 constructor:
base-salaried commission employee: Lisa Jones
social security number: 555-55-5555
gross sales: 2000.00
commission rate: 0.06
base salary: 800.00

CommissionEmployee4 constructor:
base-salaried commission employee: Mark Sands
social security number: 888-88-8888
gross sales: 8000.00
commission rate: 0.15
base salary: 0.00

BasePlusCommissionEmployee5 constructor:
base-salaried commission employee: Mark Sands
social security number: 888-88-8888
gross sales: 8000.00
commission rate: 0.15
base salary: 2000.00



9.6 Software Engineering with Inheritance

- **Customizing existing software**
 - **Inherit from existing classes**
 - **Include additional members**
 - **Redefine superclass members**
 - **No direct access to superclass's source code**
 - **Link to object code**
 - **Independent software vendors (ISVs)**
 - **Develop proprietary code for sale/license**
 - **Available in object-code format**
 - **Users derive new classes**
 - **Without accessing ISV proprietary source code**



Software Engineering Observation 9.9

Despite the fact that inheriting from a class does not require access to the class's source code, developers often insist on seeing the source code to understand how the class is implemented. Developers in industry want to ensure that they are extending a solid class—for example, a class that performs well and is implemented securely.



Software Engineering Observation 9.10

At the design stage in an object-oriented system, the designer often finds that certain classes are closely related. The designer should “factor out” common instance variables and methods and place them in a superclass. Then the designer should use inheritance to develop subclasses, specializing them with capabilities beyond those inherited from the superclass.



Software Engineering Observation 9.11

Declaring a subclass does not affect its superclass's source code. Inheritance preserves the integrity of the superclass.



Software Engineering Observation 9.12

Just as designers of non-object-oriented systems should avoid method proliferation, designers of object-oriented systems should avoid class proliferation. Such proliferation creates management problems and can hinder software reusability, because in a huge class library it becomes difficult for a client to locate the most appropriate classes. The alternative is to create fewer classes that provide more substantial functionality, but such classes might prove cumbersome.



Performance Tip 9.1

If subclasses are larger than they need to be (i.e., contain too much functionality), memory and processing resources might be wasted. Extend the superclass that contains the functionality that is closest to what is needed.



9.7 Object Class

- **Class Object methods**
 - clone
 - equals
 - finalize
 - getClass
 - hashCode
 - notify, notifyAll, wait
 - toString



Method	Description
clone	<p>This protected method, which takes no arguments and returns an Object reference, makes a copy of the object on which it is called. When cloning is required for objects of a class, the class should override method clone as a public method and should implement interface Cloneable (package java.lang). The default implementation of this method performs a so-called shallow copy—instance variable values in one object are copied into another object of the same type. For reference types, only the references are copied. A typical overridden clone method's implementation would perform a deep copy that creates a new object for each reference type instance variable. There are many subtleties to overriding method clone. You can learn more about cloning in the following article:</p> <p>java.sun.com/developer/JDCTechTips/2001/tt0306.html</p>

Fig. 9.18 | Object methods that are inherited directly or indirectly by all classes.
(Part 1 of 4)



Method	Description
<code>equals</code>	<p>This method compares two objects for equality and returns <code>true</code> if they are equal and <code>false</code> otherwise. The method takes any <code>Object</code> as an argument. When objects of a particular class must be compared for equality, the class should override method <code>equals</code> to compare the contents of the two objects. The method's implementation should meet the following requirements:</p> <ul style="list-style-type: none"> • It should return <code>false</code> if the argument is <code>null</code>. • It should return <code>true</code> if an object is compared to itself, as in <code>object1.equals(object1)</code>. • It should return <code>true</code> only if both <code>object1.equals(object2)</code> and <code>object2.equals(object1)</code> would return <code>true</code>. • For three objects, if <code>object1.equals(object2)</code> returns <code>true</code> and <code>object2.equals(object3)</code> returns <code>true</code>, then <code>object1.equals(object3)</code> should also return <code>true</code>. • If <code>equals</code> is called multiple times with the two objects and the objects do not change, the method should consistently return <code>true</code> if the objects are equal and <code>false</code> otherwise. <p>A class that overrides <code>equals</code> should also override <code>hashCode</code> to ensure that equal objects have identical hashcodes. The default <code>equals</code> implementation uses operator <code>==</code> to determine whether two references <i>refer to the same object</i> in memory. Section 29.3.3 demonstrates class <code>String</code>'s <code>equals</code> method and differentiates between comparing <code>String</code> objects with <code>==</code> and with <code>equals</code>.</p>

Fig. 9.18 | Object methods that are inherited directly or indirectly by all classes. (Part 2 of 4)



Method	Description
<code>finalize</code>	This protected method (introduced in Section 8.10 and Section 8.11) is called by the garbage collector to perform termination housekeeping on an object just before the garbage collector reclaims the object's memory. It is not guaranteed that the garbage collector will reclaim an object, so it cannot be guaranteed that the object's <code>finalize</code> method will execute. The method must specify an empty parameter list and must return <code>void</code> . The default implementation of this method serves as a placeholder that does nothing.
<code>getClass</code>	Every object in Java knows its own type at execution time. Method <code>getClass</code> (used in Section 10.5 and Section 21.3) returns an object of class <code>Class</code> (package <code>java.lang</code>) that contains information about the object's type, such as its class name (returned by <code>Class</code> method <code>getName</code>). You can learn more about class <code>Class</code> in the online API documentation at java.sun.com/j2se/5.0/docs/api/java/lang/Class.html .

Fig. 9.18 | Object methods that are inherited directly or indirectly by all classes.
(Part 3 of 4)



Method	Description
<code>hashCode</code>	A hashtable is a data structure (discussed in Section 19.10) that relates one object, called the key, to another object, called the value. When initially inserting a value into a hashtable, the key's <code>hashCode</code> method is called. The hashcode value returned is used by the hashtable to determine the location at which to insert the corresponding value. The key's hashcode is also used by the hashtable to locate the key's corresponding value.
<code>notify</code> , <code>notifyAll</code> , <code>wait</code>	Methods <code>notify</code> , <code>notifyAll</code> and the three overloaded versions of <code>wait</code> are related to multithreading, which is discussed in Chapter 23. In J2SE 5.0, the multithreading model has changed substantially, but these features continue to be supported.
<code>toString</code>	This method (introduced in Section 9.4.1) returns a <code>String</code> representation of an object. The default implementation of this method returns the package name and class name of the object's class followed by a hexadecimal representation of the value returned by the object's <code>hashCode</code> method.

Fig. 9.18 | Object methods that are inherited directly or indirectly by all classes.
(Part 4 of 4)



9.8 (Optional) GUI and Graphics Case Study: Displaying Text and Images Using Labels

- **Labels**
 - **Display information and instructions**
 - **JLabel**
 - **Display a single line of text**
 - **Display an image**
 - **Display both text and image**



Outline

Label Demo. j ava

(1 of 2)

```

1 // Fig 9.19: Label Demo. j ava
2 // Demonstrates the use of labels.
3 import java. awt. BorderLayout;
4 import javax. swi ng. ImageI con;
5 import javax. swi ng. JLabel ;
6 import javax. swi ng. JFrame;
7
8 public class Label Demo
9 {
10     public static void main( String args[] )
11     {
12         // Create a label with plain text
13         JLabel northLabel = new JLabel ( "North" );
14
15         // create an icon from an image so we can put it on a JLabel
16         ImageI con label I con = new ImageI con( "GUI ti p. gi f" );
17
18         // create a label with an icon instead of text
19         JLabel centerLabel = new JLabel ( label I con );
20
21         // create another label with an icon
22         JLabel southLabel = new JLabel ( label I con );
23
24         // set the label to display text (as well as an icon)
25         southLabel. setText( "South" );
26

```

Create a JLabel that displays the string "North"

ImageI con constructor argument specifies the path to the image

Declare and initialize centerLabel with a JLabel that displays the label I con

Change the text the southLabel displays



Outline

```


27 // create a frame to hold the labels
28 JFrame application = new JFrame();
29
30 application.setDefaultCloseOperation( JFrame.EXIT_ON_CLOSE );
31
32 // add the labels to the frame; the second argument specifies
33 // where on the frame to add the label
34 application.add( northLabel , BorderLayout.NORTH );
35 application.add( centerLabel , BorderLayout.CENTER );
36 application.add( southLabel , BorderLayout.SOUTH );
37
38 application.setSize( 300, 300 ); // set the size of the frame
39 application.setVisible( true ); // show the frame
40 } // end main
41 } // end class Label Demo

```

Attach the labels to the JFrame
at north, center and south

(2 of 2)

Lines 34-36

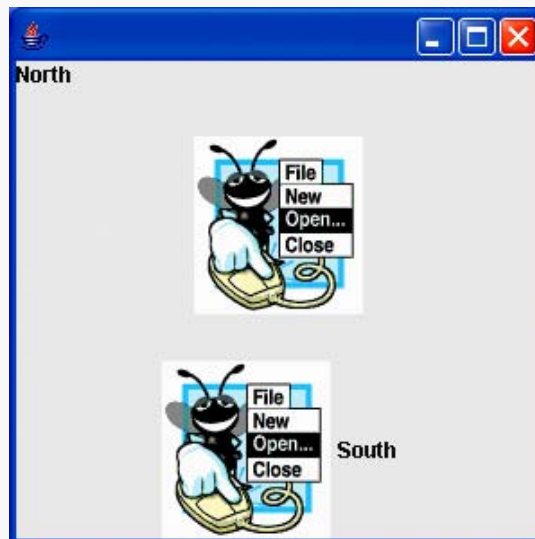

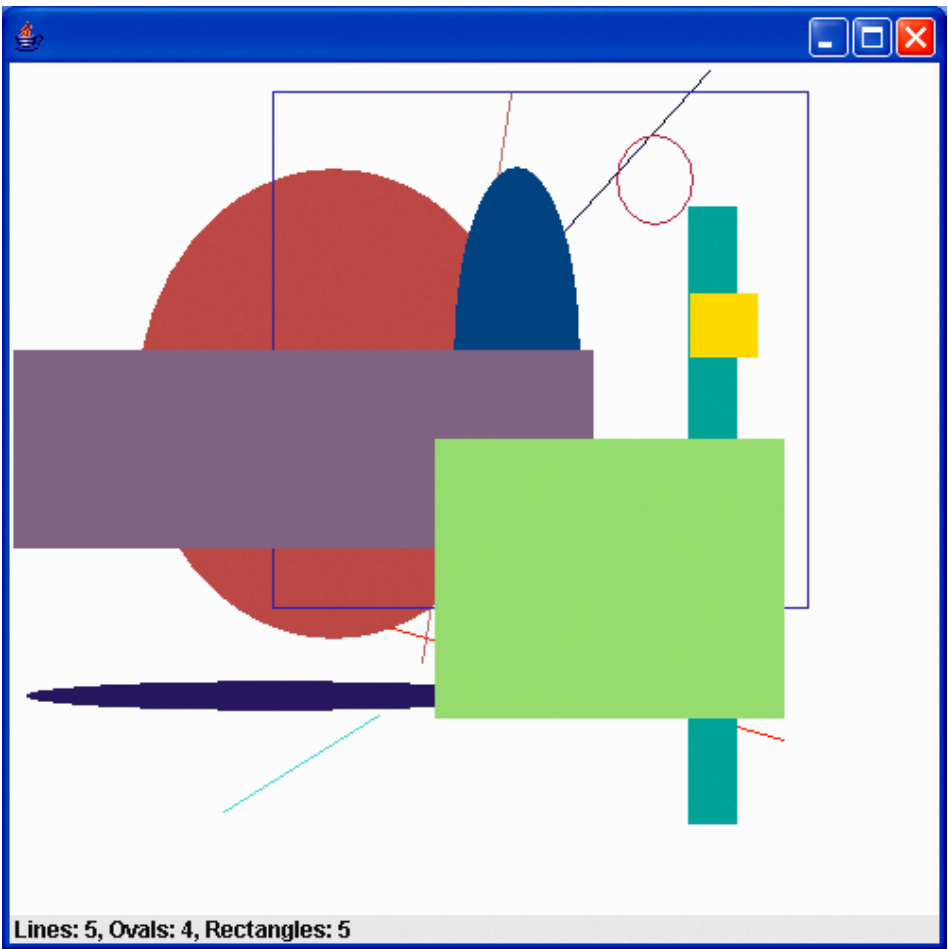


Fig. 9.20 | JLabel displaying shape statistics.

