

This Hypercard stack was prepared by:  
Dennis L. Bricker,  
Dept. of Industrial Engineering,  
University of Iowa,  
Iowa City, Iowa 52242  
e-mail: dbricker@icaen.uiowa.edu

**Quadratic  
Criterion  
&  
Linear  
Dynamics**

Multi-Dimensional  
Case

**State Variable**  $X_t$  is n-dimensional  
**Decision Variable**  $Y_t$  is m-dimensional  
 given initial state  $X_1$

$$\text{Minimize } \sum_{t=1}^T \left\{ \begin{aligned} &X_t' A_t X_t + X_t' B_t Y_t + Y_t' C_t Y_t \\ &+ d_t X_t + e_t Y_t + f_t \end{aligned} \right\}$$

$$+ X_{T+1}' A_{T+1} X_{T+1} + d_{T+1} X_{T+1} + f_{T+1}$$

where  $X_{t+1} = G_t X_t + H_t Y_t + k_t, t=1,2,\dots,T$

given initial state  $X^1$ ,

$$\text{Minimize } \sum_{t=1}^T \left\{ \begin{aligned} &X_t' A_t X_t + X_t' B_t Y_t + Y_t' C_t Y_t \\ &\quad + d_t X_t + e_t Y_t + f_t \end{aligned} \right\} \\ + X_{T+1}' A_{T+1} X_{T+1} + d_{T+1} X_{T+1} + f_{T+1} \\ \text{where } X_{t+1} = G_t X_t + H_t Y_t + k_t, t=1,2,\dots,T$$

$A_t$  is  $n \times n$ ,  $B_t$  is  $n \times m$ ,  $C_t$  is  $m \times m$ ,  $d_t$  is  $n$ -vector,  $e_t$  is  $m$ -vector, etc.

©D.L.Bricker, U.of IA, 1999

**DP** approach

*Optimal Value Function:*

$V_t(X)$  = minimum cost of stages  $t, t+1, \dots, T+1$   
given that the state at stage  $t$  is  $X$

*Can be evaluated recursively,  
and will be of the form*

$$V_t(X) = X' P_t X + q_t X + r_t$$

*(Clearly true for  $t=T+1$ )*

©D.L.Bricker, U.of IA, 1999

To compute recursively the quantities  $P$ ,  $q$ , and  $r$ , at stage  $t$ , first compute

$$\begin{cases} S_t = C_t + H_t' P_{t+1} H_t & (m \times m) \\ t_t = e_t + 2H_t' P_{t+1} k_t + H_t' q_{t+1} & (m\text{-vector}) \\ U_t = B_t' + 2H_t' P_{t+1} G_t & (m \times n) \end{cases}$$

where  $P_{T+1} = A_{T+1}$ ,  $q_{T+1} = d_{T+1}$ ,  $r_{T+1} = f_{T+1}$

©D.L.Bricker, U.of IA, 1999


Then compute

$$\begin{cases} P_t = A_t + G_t' P_{t+1} G_t - \frac{1}{4} U_t' S_t^{-1} U_t \\ q_t = d_t + 2k_t' P_{t+1} G_t + q_{t+1} G_t - \frac{1}{2} t_t' S_t^{-1} U_t \\ r_t = f_t + k_t' P_{t+1} k_t + q_{t+1} k_t + r_{t+1} - \frac{1}{4} t_t' S_t^{-1} t_t \end{cases}$$

Optimal decisions:

$$Y_t = -\frac{1}{2} S_t^{-1} [U_t X_t + t_t]$$

©D.L.Bricker, U.of IA, 1999

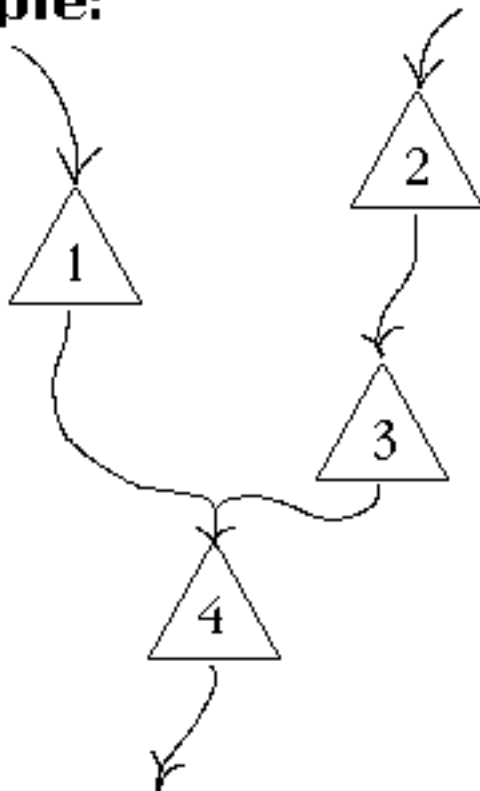**Example:**

<b>Multi-Reservoir Operation</b>
--------------------------------------

©D.L.Bricker, U.of IA, 1999

<b>Example: Multi-Reservoir Operation</b>
---

**State Variable**

$X_{ti}$  = volume of water in reservoir #i  
at the start of period t

**Decision Variable**

$Y_{ti}$  = volume released from reservoir #i  
during period t

©D.L.Bricker, U.of IA, 1999


Let  $\hat{X}_{ti}$  = target storage volume

$\hat{Y}_{ti}$  = target release

Our objective is to minimize the weighted sum of the squared deviations from the targets:

$$\text{Minimize } \sum_i \sum_t \alpha_{it} (\hat{Y}_{it} - Y_{it})^2 + \beta_{it} (\hat{X}_{it} - X_{it})^2$$

©D.L.Bricker, U.of IA, 1999

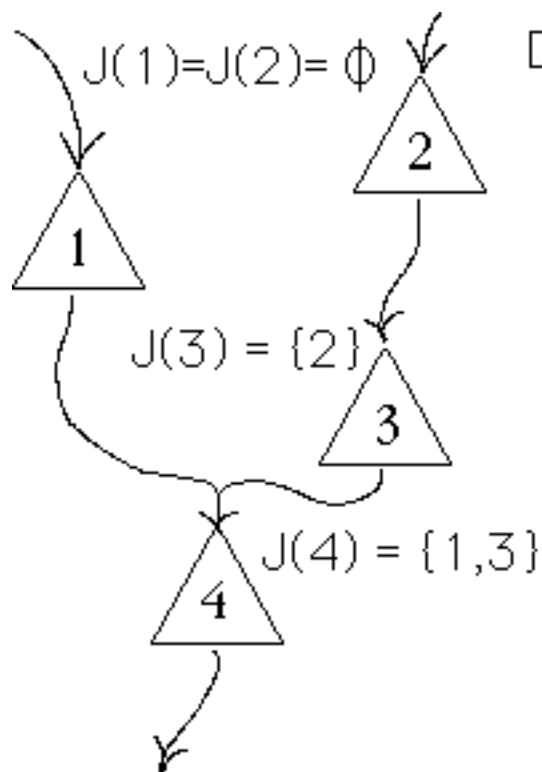

Define

$J(i)$  = set of reservoirs immediately upstream from reservoir #i

$e_{it}$  = evaporation rate of reservoir #i in period t

$I_{it}$  = inflow (exclusive of upstream releases)

©D.L.Bricker, U.of IA, 1999

## Transition Equations

$$X_{i,t+1} = (1 - e_{it}) X_{it} + \sum_{j \in J(i)} Y_{jt} - Y_{it} + I_{it}$$

*linear dynamics!*

*In reality, evaporation losses are nonlinear functions of volume, being approximately linear in the surface area of the reservoir.*

©D.L.Bricker, U.of IA, 1999

## QC/LD problem

$$\text{Minimize } \sum_i \sum_t \alpha_{it} (\hat{Y}_{it} - Y_{it})^2 + \beta_{it} (\hat{X}_{it} - X_{it})^2$$

*subject to*

$$X_{i,t+1} = (1 - e_{it}) X_{it} + \sum_{j \in J(i)} Y_{jt} - Y_{it} + I_{it}$$

*where the initial storage volumes  $X_{i1}$  are given.*

©D.L.Bricker, U.of IA, 1999

$$\begin{bmatrix} X_1 \\ X_2 \\ X_3 \\ X_4 \end{bmatrix}_{t+1} = \begin{bmatrix} 0.95 & 0 & 0 & 0 \\ 0 & 0.98 & 0 & 0 \\ 0 & 0 & 0.97 & 0 \\ 0 & 0 & 0 & 0.92 \end{bmatrix} \begin{bmatrix} X_1 \\ X_2 \\ X_3 \\ X_4 \end{bmatrix}_t + \begin{bmatrix} -1 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 \\ 0 & +1 & -1 & 0 \\ +1 & 0 & +1 & -1 \end{bmatrix} \begin{bmatrix} Y_1 \\ Y_2 \\ Y_3 \\ Y_4 \end{bmatrix}_t + \begin{bmatrix} I_1 \\ I_2 \\ I_3 \\ I_4 \end{bmatrix}_t$$

**Transition Equations**

©D.L.Bricker, U.of IA, 1999

**INFLOWS**

100	80	30	40
90	75	25	35
110	90	30	50

*(expected) inflows into 4 reservoirs during the 3 periods*

**EVAP**

0.05	0.02	0.03	0.08
------	------	------	------

*Evaporation rates of the three reservoirs*

**RESERVOIR ADJACENCY**

0	0	0	1
0	0	1	0
0	0	0	1
0	0	0	0

*Adjacency Matrix*

©D.L.Bricker, U.of IA, 1999

STORAGE $\Delta$ TARGET			
90	75	100	200
100	80	110	190
80	70	90	195
90	75	100	180

RELEASE $\Delta$ TARGET			
100	75	100	250
90	70	90	220
110	80	110	250

PEN $\Delta$ S			
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1

$\alpha$

PEN $\Delta$ R			
1	1	1	1
1	1	1	1
1	1	1	1

$\beta$

INITIAL $\Delta$ STORAGE			
100	80	90	220

©D.L.Bricker, U.of IA, 1999

a = Quadratic Cost Coefficients of X

1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1

b = Cost Coefficients of X $\times$ Y

0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0

c = Quadratic Cost Coefficients of Y

1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1

©D.L.Bricker, U.of IA, 1999



**d = Linear Cost Coefficients of X**

```
-180 -150 -200 -400
-200 -160 -220 -380
-160 -140 -180 -390
-180 -150 -200 -360
```

**e = Linear Cost Coefficients of Y**

```
-200 -150 -200 -500
-180 -140 -180 -440
-220 -160 -220 -500
```

**f = Constants in Cost Function**

```
151850 134100 150525 56125
```

©D.L.Bricker, U.of IA, 1999

**g = Linear Coefficients of X in Transition Eqn.**

```
0.95 0 0 0
0 0.98 0 0
0 0 0.97 0
0 0 0 0.92

0.95 0 0 0
0 0.98 0 0
0 0 0.97 0
0 0 0 0.92

0.95 0 0 0
0 0.98 0 0
0 0 0.97 0
0 0 0 0.92
```

**h = Linear Coefficients of Y in Transition Eqn.**

```
-1 0 0 0
0 -1 0 0
0 1 -1 0
1 0 1 -1

-1 0 0 0
0 -1 0 0
0 1 -1 0
1 0 1 -1

-1 0 0 0
0 -1 0 0
0 1 -1 0
1 0 1 -1
```

**k = Constants in Transition Eqn.**

```
100 80 30 40
90 75 25 35
110 90 30 50
```

©D.L.Bricker, U.of IA, 1999

*Initialize:*

$$P_{T+1} = A_{T+1}, q_{T+1} = d_{T+1}, r_{T+1} = f_{T+1}$$

*For*  $t=T, T-1, \dots, 2, 1$ , *compute:*

$$S_t = C_t + H_t' P_{t+1} H_t$$

$$t_t = e_t + 2H_t' P_{t+1} k_t + H_t' q_{t+1}$$

$$U_t = B_t' + 2H_t' P_{t+1} G_t$$

$$P_t = A_t + G_t' P_{t+1} G_t - \frac{1}{4} U_t' S_t^{-1} U_t$$

$$q_t = d_t + 2k_t' P_{t+1} G_t + q_{t+1} G_t - \frac{1}{2} t_t' S_t^{-1} U_t$$

$$r_t = f_t + k_t' P_{t+1} k_t + q_{t+1} k_t + r_{t+1} - \frac{1}{4} t_t' S_t^{-1} t_t$$

©D.L.Bricker, U.of IA, 1999

Array p

Results

1.75247	0.150234	0.18517	0.26271
0.150234	1.97463	0.489517	0.183195
0.18517	0.489517	1.65924	0.234675
0.26271	0.183195	0.234675	1.36283
1.69534	0.0988062	0.137776	0.22675
0.0988062	1.85358	0.396428	0.135955
0.137776	0.396428	1.58418	0.193948
0.22675	0.135955	0.193948	1.33659
1.52403	0.0300323	0.0594516	0.140968
0.0300323	1.58863	0.214652	0.0581677
0.0594516	0.214652	1.42492	0.115148
0.140968	0.0581677	0.115148	1.27303
1	0	0	0
0	1	0	0
0	0	1	0
0	0	0	1

©D.L.Bricker, U.of IA, 1999

**Array q**

```
-506.702 -493.292 -541.144 -685.525
-457.738 -419.76  -485.065 -617.351
-324.565 -288.265 -347.403 -543.135
-180      -150      -200      -360
```

**Array r**

```
141203 122073 92082.3 56125
```

©D.L.Bricker, U.of IA, 1999

$$\begin{aligned}
 V_1(X) &= X' P_1 X + q_1 X + r_1 && \text{Optimal total cost} \\
 &= \begin{bmatrix} X_1 & X_2 & X_3 & X_4 \end{bmatrix} \begin{bmatrix} 1.75247 & 0.150234 & 0.18517 & 0.26271 \\ 0.150234 & 1.97463 & 0.489517 & 0.183195 \\ 0.18517 & 0.489517 & 1.65924 & 0.234675 \\ 0.26271 & 0.183195 & 0.234675 & 1.36283 \end{bmatrix} \begin{bmatrix} X_1 \\ X_2 \\ X_3 \\ X_4 \end{bmatrix} \\
 &+ \begin{bmatrix} -506.702 & -493.292 & -541.144 & -685.525 \end{bmatrix} \begin{bmatrix} X_1 \\ X_2 \\ X_3 \\ X_4 \end{bmatrix} + 141203 \\
 &= 1.75247X_1^2 + 2(0.150234)X_1 X_2 + \dots + 1.36283X_4^2 \\
 &\quad -506.702X_1 - \dots - 685.525X_4 + 141203
 \end{aligned}$$

where

**INITIALΔSTORAGE**

X = 100 80 90 220

©D.L.Bricker, U.of IA, 1999

Array s
---------

3.57843	0.0190237	1.05367	-1.10984
0.0190237	3.6449	-1.12976	-0.0579936
1.05367	-1.12976	3.53287	-1.14264
-1.10984	-0.0579936	-1.14264	2.33659
3.51513	0.0275613	1.07637	-1.13206
0.0275613	3.58425	-1.15329	-0.0569806
1.07637	-1.15329	3.46766	-1.15788
-1.13206	-0.0569806	-1.15788	2.27303
3	0	1	-1
0	3	-1	0
1	-1	3	-1
-1	0	-1	2

Array t
---------

-555.229	-364.751	-348.169	-68.3163
-561.273	-335.438	-368.969	-25.8335
-520	-330	-340	-240

©D.L.Bricker, U.of IA, 1999

Array u
---------

-2.79031	0.0728113	0.108974	2.04211
0.0740428	-2.85602	2.30423	0.106708
0.169051	-0.510528	-2.69705	2.10247
-0.430826	-0.266471	-0.37626	-2.45933
-2.62782	0.0551455	0.108052	2.083
0.0558968	-2.693	2.34793	0.104844
0.154881	-0.306708	-2.54096	2.13051
-0.267839	-0.114009	-0.223388	-2.34238
-1.9	0	0	1.84
0	-1.96	1.94	0
0	0	-1.94	1.84
0	0	0	-1.84

©D.L.Bricker, U.of IA, 1999

$$Y_t = -\frac{1}{2} S_t^{-1} [U_t X_t + t_t]$$

Optimal Decisions

$$= -\frac{1}{2} \begin{bmatrix} 3.578 & 0.019 & 1.053 & -1.109 \\ 0.019 & 3.644 & -1.129 & -0.057 \\ 1.053 & -1.129 & 3.532 & -1.142 \\ -1.109 & -0.057 & -1.142 & 2.336 \end{bmatrix}^{-1} \left\{ \begin{bmatrix} -2.7903 \\ 0.0728 \\ 0.1089 \\ 2.0421 \end{bmatrix} \begin{bmatrix} X_1 \\ X_2 \\ X_3 \\ X_4 \end{bmatrix} + \begin{bmatrix} -555.229 \\ -364.751 \\ -348.169 \\ -68.316 \end{bmatrix} \right\}$$

©D.L.Bricker, U.of IA, 1999

Forward Computations of  
Optimal States & Decisions

Stage 1

State X= 100 80 90 220  
Decision Y= 99.2614 82.817 98.9775 249.029

Stage 2

State X= 95.7386 75.583 101.14 191.61  
Decision Y= 95.4911 73.3701 99.8843 217.195

Stage 3

State X= 85.4606 75.7012 96.5911 189.461  
Optimal value is 1200.51

©D.L.Bricker, U.of IA, 1999

Optimal Solution  
QC/LD Problem

		Reservoir			
t		1	2	3	4
1		100	80	90	220
2		95.7386	75.583	101.14	191.61
3		85.4606	75.7012	96.5911	189.461

State Variables  
(Storage Volumes)

		Reservoir			
t		1	2	3	4
1		99.2614	82.817	98.9775	249.029
2		95.4911	73.3701	99.8843	217.195

Decision  
Variables